

# KLIK KLAK



# Il sistema magnetico che si adatta agli spazi e ai loro cambiamenti.

The magnetic system that adapts to spaces and their changes.

Un sistema completo che si inserisce in maniera minimale negli spazi abitativi e commerciali rendendo la luce parte integrante del progetto di design. *Klik Klak* è declinabile in diverse tipologie di installazione (incasso a raso, a soffitto ed a sospensione) con la possibile aggiunta di curve, si adatta a qualsiasi superficie. L'inserimento dei corpi illuminanti con fissaggio magnetico completano il sistema, rendendo semplice il loro spostamento secondo necessità, e grazie all'alimentazione a 24V che lo rende sicuro da maneggiare. L'introduzione della linea di driver dimmerabili lo rende ancora di più un sistema personalizzabile, non solo nella sua struttura ma anche nell'emissione di luce. Facile e veloce. *Klik Klak*.

It's a complete range which discreetly steps into residential or commercial environments making light a fundamental part of the whole design project. The system can be installed in several applications (recessed, ceiling mounted or suspended) and thanks to its corner accessories it's suitable for any kind of surface. 24V lighting fittings with magnetic fastening can be inserted very easily and they can be safely moved around along the profile according to the customer's requirements. The system has now been enriched with a range of dimmable drivers which make KLIK KLAK even more versatile, not only in its structure, but also in the quality and type of light emitted. Easy and quick. KLIK KLAK.







# Combinazioni infinite

# Endless combinations


Applicazione su superficie  
Surface application




Applicazione ad incasso  
Recessed application




Lunghezza 1 metro  
1 mt lenght




Lunghezza 2 metri  
2 mt lenght




Finitura bianca  
White finishing




Finitura nera  
Black finishing





Raccordo 90° in piano  
Flat 90° junction

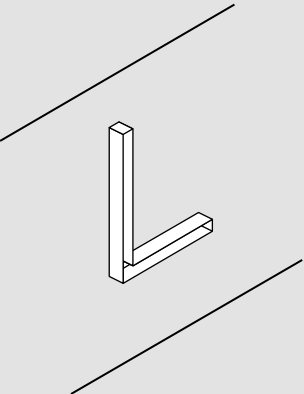


Raccordo 90° esterno  
Outer 90° junction

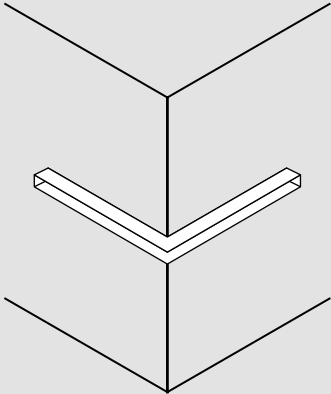


Raccordo 90° interno  
Inner 90° junction

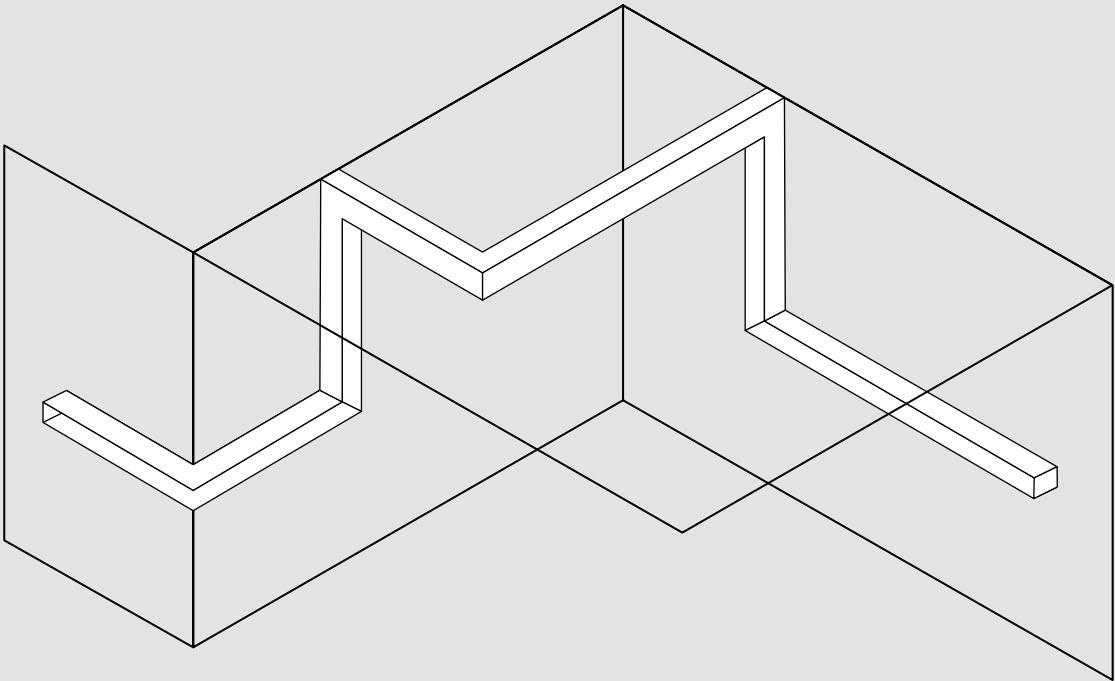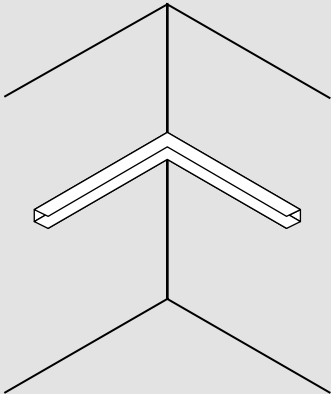

Luce puntiformi  
Dots

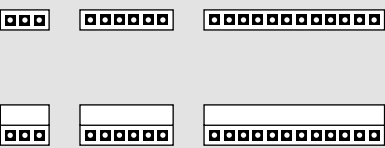




Proiettori  
Spotlights



Sospensione  
Suspension light



Luce diffusa  
General lighting

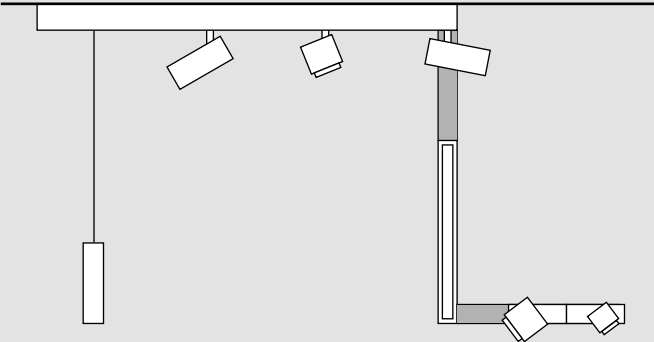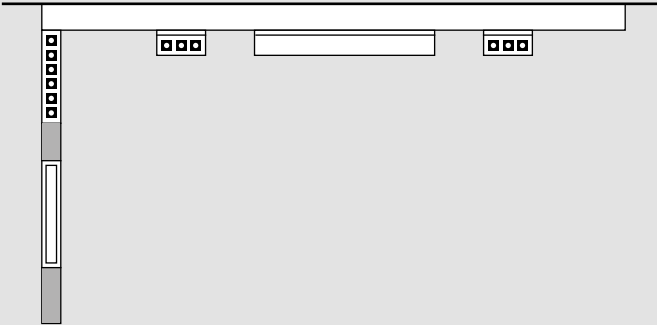

KLIK KLAK

Dati tecnici

5  
ANNI  
GARANZIA

LED


A

III


IP20

24V

CE




| Code  | Finishing    | Beam | Watt | Kelvin | LED  | Lumen | CRI | PF   |
|-------|--------------|------|------|--------|------|-------|-----|------|
| 41111 | Nero/Black   | 36°  | 10W  | 3000K  | CREE | 870   | >90 | >0,5 |
| 41112 | Bianco/White | 36°  | 10W  | 3000K  | CREE | 870   | >90 | >0,5 |
| 41179 | Nero/Black   | 36°  | 10W  | 4000K  | CREE | 870   | >90 | >0,5 |
| 41192 | Bianco/White | 36°  | 10W  | 4000K  | CREE | 870   | >90 | >0,5 |

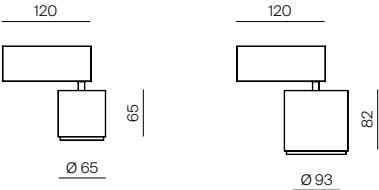


| Code  | Finishing    | Beam | Watt | Kelvin | LED  | Lumen | CRI | PF   |
|-------|--------------|------|------|--------|------|-------|-----|------|
| 41176 | Nero/Black   | 36°  | 8W   | 3000K  | CREE | 450   | >90 | >0,5 |
| 41175 | Bianco/White | 36°  | 8W   | 3000K  | CREE | 450   | >90 | >0,5 |
| 41178 | Nero/Black   | 36°  | 15W  | 3000K  | CREE | 850   | >90 | >0,5 |
| 41177 | Bianco/White | 36°  | 15W  | 3000K  | CREE | 850   | >90 | >0,5 |


| Code  | Finishing    | Beam | Watt | Kelvin | LED  | Lumen | CRI | PF   |
|-------|--------------|------|------|--------|------|-------|-----|------|
| 41213 | Nero/Black   | 36°  | 8W   | 4000K  | CREE | 450   | >90 | >0,5 |
| 41214 | Bianco/White | 36°  | 8W   | 4000K  | CREE | 450   | >90 | >0,5 |
| 41215 | Nero/Black   | 36°  | 15W  | 4000K  | CREE | 850   | >90 | >0,5 |
| 41216 | Bianco/White | 36°  | 15W  | 4000K  | CREE | 850   | >90 | >0,5 |

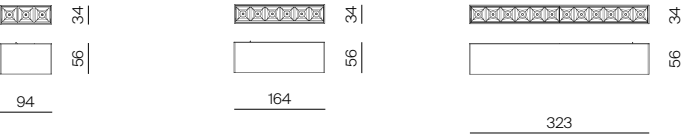

| Code  | Finishing    | Beam | Watt  | Kelvin | LED   | Lumen | CRI | PF   |
|-------|--------------|------|-------|--------|-------|-------|-----|------|
| 41119 | Nero/Black   | 34°  | 3x1W  | 3000K  | OSRAM | 255   | >90 | >0,5 |
| 41122 | Bianco/White | 34°  | 3x1W  | 3000K  | OSRAM | 255   | >90 | >0,5 |
| 41120 | Nero/Black   | 34°  | 6x1W  | 3000K  | OSRAM | 510   | >90 | >0,5 |
| 41123 | Bianco/White | 34°  | 6x1W  | 3000K  | OSRAM | 510   | >90 | >0,5 |
| 41121 | Nero/Black   | 34°  | 12x1W | 3000K  | OSRAM | 1020  | >90 | >0,5 |
| 41124 | Bianco/White | 34°  | 12x1W | 3000K  | OSRAM | 1020  | >90 | >0,5 |
| 41199 | Nero/Black   | 34°  | 3x1W  | 4000K  | OSRAM | 255   | >90 | >0,5 |
| 41202 | Bianco/White | 34°  | 3x1W  | 4000K  | OSRAM | 255   | >90 | >0,5 |
| 41200 | Nero/Black   | 34°  | 6x1W  | 4000K  | OSRAM | 510   | >90 | >0,5 |
| 41203 | Bianco/White | 34°  | 6x1W  | 4000K  | OSRAM | 510   | >90 | >0,5 |
| 41201 | Nero/Black   | 34°  | 12x1W | 4000K  | OSRAM | 1020  | >90 | >0,5 |
| 41204 | Bianco/White | 34°  | 12x1W | 4000K  | OSRAM | 1020  | >90 | >0,5 |





| Code  | Finishing    | Beam | Watt | Kelvin | LED   | Lumen | CRI | PF   |
|-------|--------------|------|------|--------|-------|-------|-----|------|
| 41174 | Nero/Black   | 30°  | 10W  | 3000K  | OSRAM | 714   | >90 | >0,5 |
| 41173 | Bianco/White | 30°  | 10W  | 3000K  | OSRAM | 714   | >90 | >0,5 |
| 41212 | Nero/Black   | 30°  | 10W  | 4000K  | OSRAM | 714   | >90 | >0,5 |
| 41211 | Bianco/White | 30°  | 10W  | 4000K  | OSRAM | 714   | >90 | >0,5 |

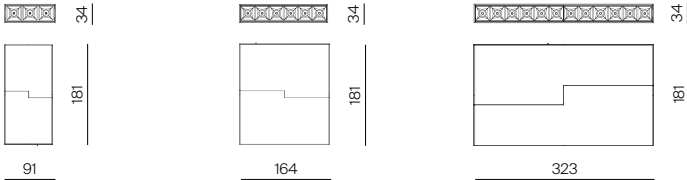

| Code  | Finishing    | Beam | Watt  | Kelvin | LED   | Lumen | CRI | PF   |
|-------|--------------|------|-------|--------|-------|-------|-----|------|
| 41125 | Nero/Black   | 34°  | 3x1W  | 3000K  | OSRAM | 255   | >90 | >0,5 |
| 41128 | Bianco/White | 34°  | 3x1W  | 3000K  | OSRAM | 255   | >90 | >0,5 |
| 41126 | Nero/Black   | 34°  | 6x1W  | 3000K  | OSRAM | 510   | >90 | >0,5 |
| 41129 | Bianco/White | 34°  | 6x1W  | 3000K  | OSRAM | 510   | >90 | >0,5 |
| 41127 | Nero/Black   | 34°  | 12x1W | 3000K  | OSRAM | 1020  | >90 | >0,5 |
| 41130 | Bianco/White | 34°  | 12x1W | 3000K  | OSRAM | 1020  | >90 | >0,5 |
| 41205 | Nero/Black   | 34°  | 3x1W  | 4000K  | OSRAM | 255   | >90 | >0,5 |
| 41208 | Bianco/White | 34°  | 3x1W  | 4000K  | OSRAM | 255   | >90 | >0,5 |


| Code  | Finishing    | Beam | Watt  | Kelvin | LED   | Lumen | CRI | PF   |
|-------|--------------|------|-------|--------|-------|-------|-----|------|
| 41206 | Nero/Black   | 34°  | 6x1W  | 4000K  | OSRAM | 510   | >90 | >0,5 |
| 41209 | Bianco/White | 34°  | 6x1W  | 4000K  | OSRAM | 510   | >90 | >0,5 |
| 41207 | Nero/Black   | 34°  | 12x1W | 4000K  | OSRAM | 1020  | >90 | >0,5 |
| 41210 | Bianco/White | 34°  | 12x1W | 4000K  | OSRAM | 1020  | >90 | >0,5 |



| Code  | Finishing    | Beam | Watt | Kelvin | LED   | Lumen | CRI | PF   |
|-------|--------------|------|------|--------|-------|-------|-----|------|
| 41113 | Nero/Black   | 90°  | 10W  | 3000K  | OSRAM | 850   | >90 | >0,5 |
| 41116 | Bianco/White | 90°  | 10W  | 3000K  | OSRAM | 850   | >90 | >0,5 |
| 41114 | Nero/Black   | 90°  | 20W  | 3000K  | OSRAM | 1700  | >90 | >0,5 |
| 41117 | Bianco/White | 90°  | 20W  | 3000K  | OSRAM | 1700  | >90 | >0,5 |
| 41115 | Nero/Black   | 90°  | 30W  | 3000K  | OSRAM | 2550  | >90 | >0,5 |
| 41118 | Bianco/White | 90°  | 30W  | 3000K  | OSRAM | 2550  | >90 | >0,5 |
| 41193 | Nero/Black   | 90°  | 10W  | 4000K  | OSRAM | 850   | >90 | >0,5 |
| 41196 | Bianco/White | 90°  | 10W  | 4000K  | OSRAM | 850   | >90 | >0,5 |
| 41194 | Nero/Black   | 90°  | 20W  | 4000K  | OSRAM | 1700  | >90 | >0,5 |
| 41197 | Bianco/White | 90°  | 20W  | 4000K  | OSRAM | 1700  | >90 | >0,5 |
| 41195 | Nero/Black   | 90°  | 30W  | 4000K  | OSRAM | 2550  | >90 | >0,5 |
| 41198 | Bianco/White | 90°  | 30W  | 4000K  | OSRAM | 2550  | >90 | >0,5 |



Accessori

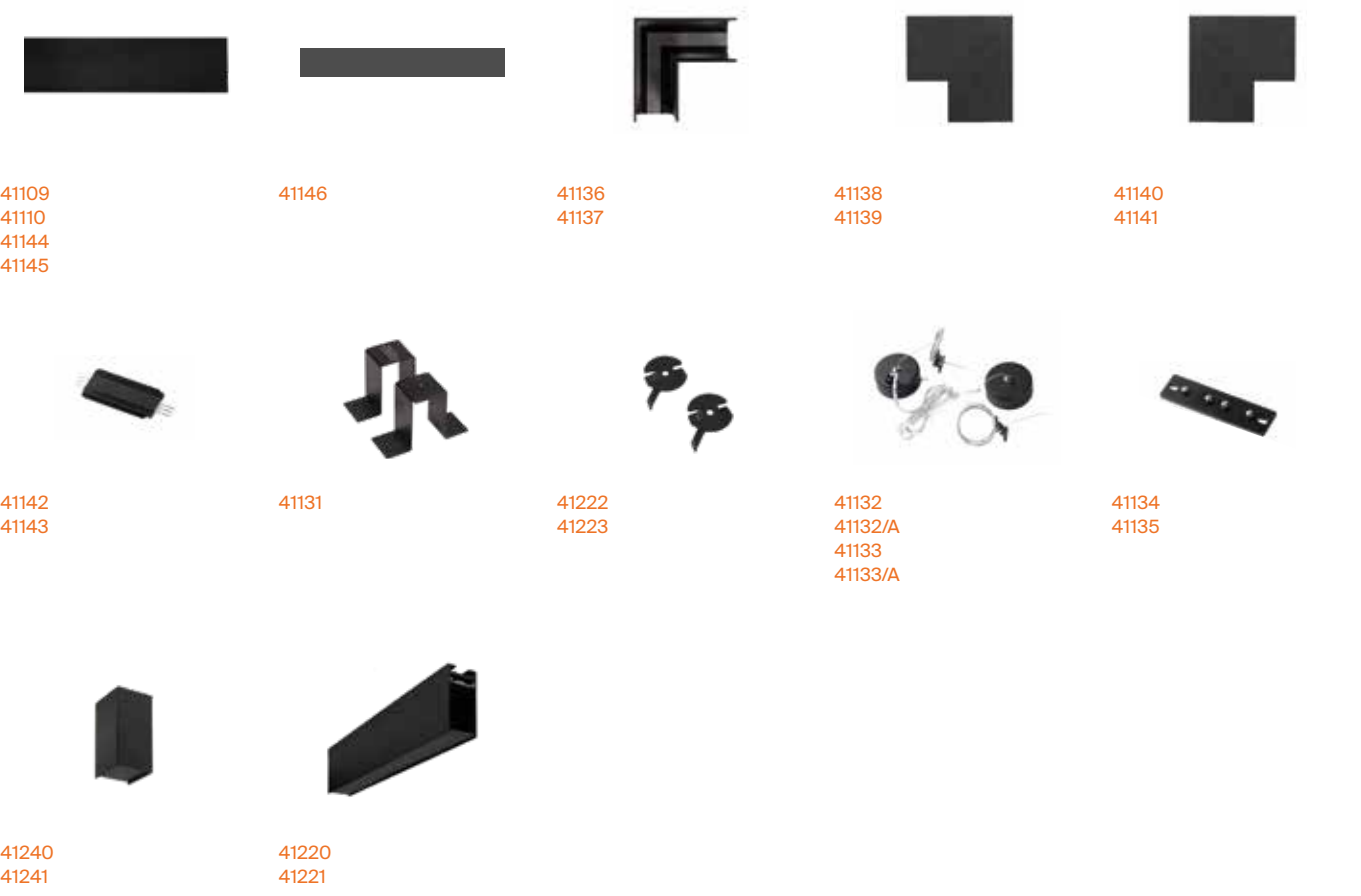

| Code  | Finishing      | Description                                                                                                                     |
|-------|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| 41109 | Nero / Black   | Struttura 1mt in alluminio estruso con testate/<br>1mt extruded aluminium profile with end-caps                                 |
| 41110 | Bianco / White | Struttura 1mt in alluminio estruso con testate/<br>1mt extruded aluminium profile with end-caps                                 |
| 41144 | Nero / Black   | Struttura 2mt in alluminio estruso con testate/<br>2mt extruded aluminium profile with end-caps                                 |
| 41145 | Bianco / White | Struttura 2mt in alluminio estruso con testate/<br>2mt extruded aluminium profile with end-caps                                 |
| 41146 | Nero / Black   | Copertura per rasatura 1 mt/ 1 mt mask for plasterboard thinning                                                                |
| 41136 | Nero / Black   | Angolo 90° con spinotti e staffe connessione/<br>90° corner with relative 3-pins connectors and connection plates               |
| 41137 | Bianco / White | Angolo 90° con spinotti e staffe connessione/<br>90° corner with relative 3-pins connectors and connection plates               |
| 41138 | Nero / Black   | Angolo 90° esterno con spinotti e staffe connessione/<br>Outer 90° corner with relative 3-pins connectors and connection plates |
| 41139 | Bianco / White | Angolo 90° esterno con spinotti e staffe connessione/<br>Outer 90° corner with relative 3-pins connectors and connection plates |

| Code    | Finishing      | Description                                                                                                                     |
|---------|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| 41140   | Nero / Black   | Angolo 90° interno con spinotti e staffe connessione/<br>Inner 90° corner with relative 3-pins connectors and connection plates |
| 41141   | Bianco / White | Angolo 90° interno con spinotti e staffe connessione/<br>Inner 90° corner with relative 3-pins connectors and connection plates |
| 41142   | Nero / Black   | Congiunzione elettrica con spinotti/<br>Linear 65mm electric connection with relative 3-pins connector                          |
| 41143   | Bianco / White | Congiunzione elettrica con spinotti/<br>Linear 65mm electric connection with relative 3-pins connector                          |
| 41131   | Nero / Black   | Kit staffe incasso (2 pz)/ Brackets for recessed installation (2 pcs)                                                           |
| 41222   | Nero / Black   | Staffe attacco soffitto kit 2pz/ Brackets for ceiling installation (2 pcs)                                                      |
| 41223   | Bianco / White | Staffe attacco soffitto kit 2pz/ Brackets for ceiling installation (2 pcs)                                                      |
| 41132   | Nero / Black   | Sospensione 2mt (1 pz) / Suspension 2mt (1 pc)                                                                                  |
| 41132/A | Nero / Black   | Sospensione con cavo alimentazione 2mt (1 pz) /<br>Suspension 2mt with electrical wire (1 pc)                                   |
| 41133   | Bianco / White | Sospensione 2mt (1 pz) / Suspension 2mt (1 pc)                                                                                  |
| 41133/A | Bianco / White | Sospensione con cavo alimentazione 2mt (1 pz) /<br>Suspension 2mt with electrical wire (1 pc)                                   |
| 41134   | Nero / Black   | Staffa connessione (1 pz) / Linear connection plate (1 pc)                                                                      |
| 41135   | Bianco / White | Staffa connessione (1 pz) / Linear connection plate (1 pc)                                                                      |
| 41241   | Nero / Black   | Testata per alimentazione 24V/Front feed 24V                                                                                    |
| 41240   | Bianco / White | Testata per alimentazione 24V/Front feed 24V                                                                                    |
| 41221   | Nero / Black   | Testata con driver 200W 230V/Front feed with driver 200W 230V                                                                   |
| 41220   | Bianco / White | Testata con driver 200W 230V/Front feed with driver 200W 230V                                                                   |

Driver

| Code  | Size          | Description                  |
|-------|---------------|------------------------------|
| 22015 | 99x82x30mm    | driver 50W 24V DC            |
| 22016 | 129x97x30mm   | driver 100W 24V DC           |
| 22025 | 160x95x30mm   | driver 150W 24V DC           |
| 22017 | 215x115x30mm  | driver 200W 24V DC           |
| 41217 | 144x78x38.5mm | driver dimmerabile 230V 75W  |
| 41218 | 240x70x36mm   | driver dimmerabile 230V 96W  |
| 41219 | 270x79x39mm   | driver dimmerabile 230V 200W |



# LOGICA

Logica è un marchio di Marino Cristal S.p.A.

**Marino Cristal S.p.A.**

Via Guardia del Consiglio 29

47899 Serravalle - Rep. di San Marino

Tel. (++378) 0549 901188

Fax (++378) 0549 900612

[www.logicailluminazione.com](http://www.logicailluminazione.com)

[info@logicailluminazione.com](mailto:info@logicailluminazione.com)