



MARINO CRISTAL SPA

Via Guardia del Consiglio, 29/31
47899 - Serravalle
REP. DI SAN MARINO
TEL +378 0549 901188
FAX +378 0549 900612
www.marinocristal.com
marinocristal@marinocristal.com

BOOK 2022 LED LIGHTING SOLUTION



Ω HOME GA[®]
ILLUMINAZIONE

BOOK 2022
LED LIGHTING
SOLUTION

INDEX

INTERNO

PANNELLI

PANNELLI LED 60X60	08
PANNELLO LED 60X60 UGR<19	09
PANNELLO LED 30X120	10
PANNELLO LED 30X120 UGR<19	11

INCASSI

ERCOLE	14
ERCOLE IP54	15
VULCANO EVO	16
LEDSPOT_TRP1	18
LEDSPOT_MULTI LIGHT	19
QUADRO_30	20
CAMALEONTE_T	22
CAMALEONTE_Q	23
DIN	24
DON	25
SPLASH	27
HELIOS_50 FISSO	28
HELIOS_50 REGOLABILE	29

SOFFITTO / PARETE

PLAFOLED_T	32
PLAFOLED_Q	33
HYDRA T	34
HYDRA Q	35
PANNELLO TONDO	36
ISIDE	37
MAYA	38
DISCO	39
LUCE QUADRO	40

INDUSTRIALE

HORUS	44
ATON	45
STAGNA_IP65	46
CARONTE	47

ESTERNO

PROIETTORI

ATLANTE	50
PIKKO	52
LAMPO	54
LAMPO C/SENSORE	56

SOFFITTO / PARETE

ZAGOR	60
MOON	61
LUNA_T	62
LUNA_O	63
LADY_T	64
SIGNUS	66
WALLY OPEN	69
ELEGANT_EVO	70
RINGO	71
KANDO_T	72
KANDO_Q	73
BRICK_IP67	74
BRICK	75





TRANSFORMATORI ED ACCESSORI 78

LISTINO PREZZI 80

INDICE ALFABETICO 85

PANNELLI
INTERNO

PANNELLO_LED

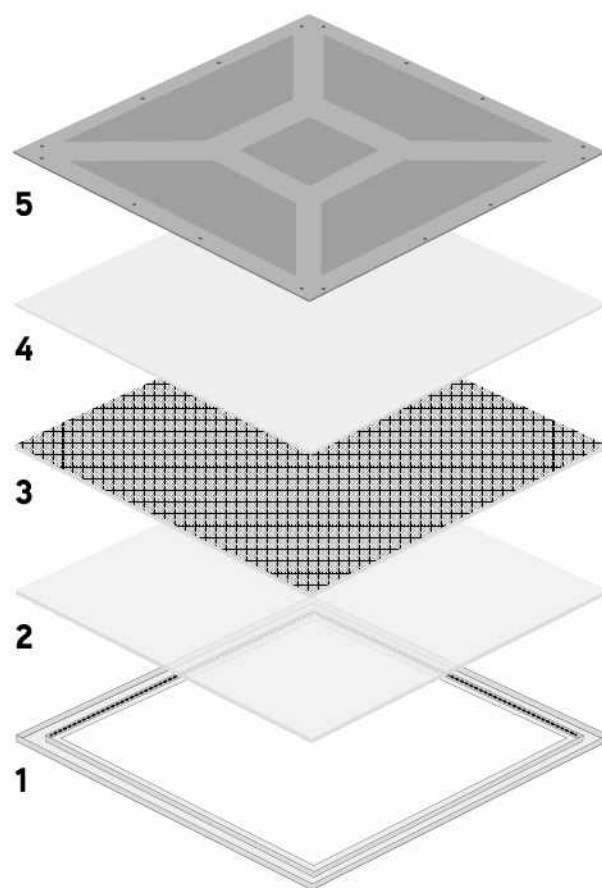

CORNICE ALLUMINIO CON STRISCE LED
Profilo in alluminio da 290 gr concepito per una migliore dissipazione del calore e dotato di una struttura meccanicamente più stabile. Cornice di alluminio con striscia LED con chip 4014 ad alta efficienza anziché chip 2835 a bassa efficienza luminosa.

ALUMINIUM FRAME WITH LED STRIPS
Aluminium frame with 290g structure provides a better heat dissipation and a more stable mechanical structure. Led strips high lumen efficiency 4014 chip instead of low efficiency 2835 chip.

DIFFUSORE
Diffusore in PS da 1,2 mm garantisce l'uniformità dell'emissione ed il mantenimento della temperatura colore (°K). Non usiamo diffusori in PP che ingialliscono in breve tempo modificando la temperatura di colore.

DIFFUSER
1,2 mm PS diffuser ensures light smoothness and colour temperature maintenance (°K) over time. We do not mount PP diffusers which turn yellowish and modify the colour temperature in a very short time

LGP
In PMMA da 2,8 mm di qualità assicura un alto indice di mantenimento del flusso luminoso anziché PP o PS che causano un decadimento del flusso luminoso nel breve periodo.

LGP
2,8 mm quality PMMA LGP ensures high luminous flux maintenance over time instead of PP or PS which cause a drastic lumen depreciation.

CARTA RIFLETTENTE
Foglio PET a doppio rivestimento che migliora l'efficienza luminosa.

PAPER REFLECTOR
Double coated PET sheet which improves light efficiency.

TAMPONAMENTO DI CHIUSURA

CLOSING SHEET





PANNELLO_LED 60X60



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs

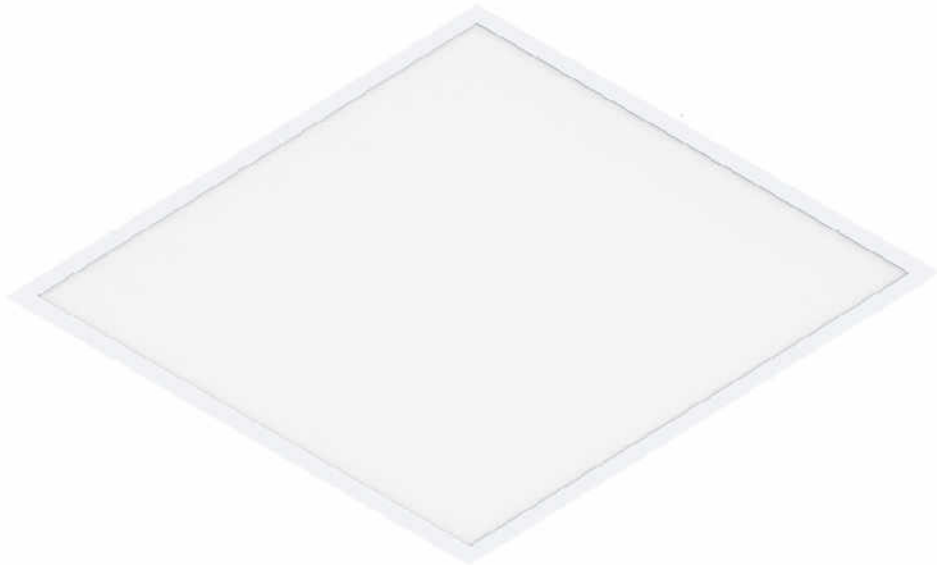

42538
cornice per montaggio cartongesso /
frame for recessed mounting
620x620



42539
accessorio soffitto H mm. 43 /
ceiling accessory H mm. 43



11622/2
accessorio sospensione H mt. 2 /
suspension accessory H mt. 2



Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional



Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional

CODICE / CODE	41649	41650
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W /Light Source W:	36W	36W
Sorgente luminosa/Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,3	2,3
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	8,5	8,5


ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, 1-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA 1-10V	
	12551	Emergenza/Emergency 30% - 90min MAX 40W	listino prezzi Logica/Logica pricelist

PANNELLO LED 60x60 UGR<19



Apparecchio da incasso/soffitto/
sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs




42538
cornice per montaggio cartongesso /
frame for recessed mounting
620x620



42539
accessorio soffitto H mm. 43 /
ceiling accessory H mm. 43



11622/2
accessorio sospensione H mt. 2 /
suspension accessory H mt. 2



Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional



Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional

CODICE / CODE	41653	41654
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W/Light Source W:	36W	36W
Sorgente luminosa/Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	595	595
b	9	9

ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, 1-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA 1-10V	
	12551	Emergenza/Emergency 30% - 90min MAX 40W	listino prezzi Logica/Logica pricelist

PANNELLO_LED 30x120



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs



42542
cornice per montaggio cartongesso /
frame for recessed mounting
320x1220



42540
accessorio soffitto H mm 43 /
ceiling accessory H mm 43



11622/3
accessorio sospensione H mt. 2 /
suspension accessory H mt. 2



Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional



Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional

CODICE / CODE	41651	41652
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W/Light Source W:	36W	36W
Sorgente luminosa/Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	1195	1195
b	295	295
c	9	9

ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, 1-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA 1-10V	
	12551	Emergenza/Emergency 30% - 90min MAX 40W	listino prezzi Logica/Logica pricelist

PANNELLO_LED 30x120 UGR<19



Apparecchio da incasso/
soffitto/sospensione LED integrato
Corpo in alluminio verniciato
LGP in PMMA
Diffusore in PS
Driver incluso

Recessed/ceiling/suspension fitting
with built-in LED
Painted aluminium body
PMMA LGP
PS Diffuser
Driver included
L80B30_50000hrs



42542
cornice per montaggio cartongesso /
frame for recessed mounting
320x1220



42540
accessorio soffitto H mm 43 /
ceiling accessory H mm 43



11622/3
accessorio sospensione H mt. 2 /
suspension accessory H mt. 2



Sorgente luminosa sostituibile
solo da tecnico abilitato
Replaceable light source by
a professional



Driver sostituibile solo da
tecnico abilitato
Replaceable control gear by
a professional

CODICE / CODE	41655	41656
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	3600	4000
Sorgente luminosa W/Light Source W:	36W	36W
Sorgente luminosa/Light Source lumen:	4600	4600
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	SMD 4014	SMD 4014
WATT	40W	40W
SUPPLY	230V 50/60Hz	230V 50/60Hz
DRIVER	1000mA/25-40V flicker-free	1000mA/25-40V flicker-free
KG	2,6	2,6
PCS	5	5
DIMENSIONI / DIMENSIONS		
a	1195	1195
b	295	295
c	9	9



ACCESSORI	42683	Driver ONE4ALL 220-240V 12-42V 650-1110mA Dali, Push, 1-10V	listino prezzi Logica/Logica pricelist
ACCESSORIES	40314	Driver 110-277V 14-42V 400-1100mA 1-10V	
	12551	Emergenza/Emergency 30% - 90min MAX 40W	listino prezzi Logica/Logica pricelist

INCASSI
INTERNO



Incasso LED integrato
Corpo in alluminio
Diffusore in PC opale
Driver incluso

Recessed fitting with built-in LED
Aluminium body
Opal PC diffuser
Driver included

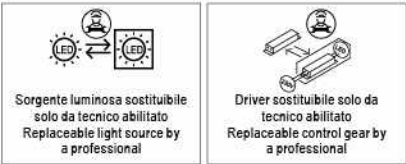



CODICE / CODE	41253	41254
BEAM	90°	90°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	1980	2090
Sorgente luminosa W/Light Source W:	22W	22W
Sorgente luminosa/Light Source lumen:	2837	2855
Class Energetica/Energy Class:	E	E
CRI	80	80
LED	EPISTAR	EPISTAR
WATT	22W	22W
SUPPLY	220-240V	220-240V
DRIVER	50.4-59.4V/350mA	50.4-59.4V/350mA
KG	0.55	0.55
PCS	16	16
DIMENSIONI / DIMENSIONS		
a	230	230
b	65.5	65.5
cut size	200	200




Incasso LED integrato
Corpo in alluminio pressofuso
Diffusore in PC opale
Riflettore cromato
Driver incluso

Recessed fitting with built-in LED
Die-cast aluminium body
Opal PC diffuser
Driver included

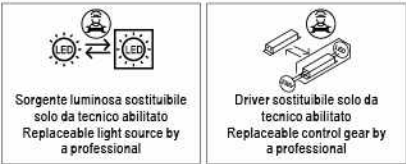


CODICE / CODE	41255	41256
BEAM	90°	90°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	1995	2110
Sorgente luminosa W/Light Source W:	22W	22W
Sorgente luminosa/Light Source lumen:	2837	2855
Class Energetica/Energy Class:	E	E
CRI	80	80
LED	EPISTAR	EPISTAR
WATT	23W	23W
SUPPLY	220-240V	220-240V
DRIVER	50.4-59.4V/350mA	50.4-59.4V/350mA
KG	1.22	1.22
PCS	8	8
DIMENSIONI / DIMENSIONS		
a	230	230
b	88	88
cut size	200	200

VULCANO_EVO



Incasso LED integrato
Corpo in TRP
Diffusore in PC opale
Riflettore cromato
Driver integrato


Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Chromed reflector
Built-in driver

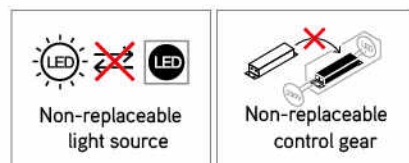

CODICE / CODE	40571	40572	40573	40574	40575	40576	40577	40578
BEAM	80°	75°	65°	65°	80°	75°	65°	65°
COLORE / COLOUR	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	4000K	4000K	4000K	4000K
LUMEN	1000	1400	1600	1900	1100	1500	1700	2000
Sorgente luminosa W/Light Source W:	15W	20W	25W	30W	15W	20W	25W	30W
Sorgente luminosa/Light Source lumen:	1750	2300	2800	3300	1850	2400	2900	3400
Class Energetica/Energy Class:	E	E	E	E	E	E	E	E
CRI	>80	>80	>80	>80	>80	>80	>80	>80
LED	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight	Everlight
WATT	15W	20W	25W	30W	15W	20W	25W	30W
PF	>0,5	>0,5	>0,9	>0,9	>0,5	>0,5	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,25	0,35	0,47	0,47	0,25	0,35	0,47	0,47
DRIVER	140mA/90V	160mA/108V	160mA/135V	240mA/108V	140mA/90V	160mA/108V	160mA/135V	240mA/108V
FORO / HOLE	Ø125	Ø160	Ø200	Ø200	Ø125	Ø160	Ø200	Ø200
PCS	40	20	20	20	40	20	20	20
DIMENSIONI / DIMENSIONS								
a	150	190	230	230	150	190	230	230
b	81	91	101,5	101,5	81	91	101,5	101,5




LEDSPOT_TRP1



Incasso LED integrato
Corpo in TRP
Diffusore in PC opale
Driver integrato

Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Built-in driver

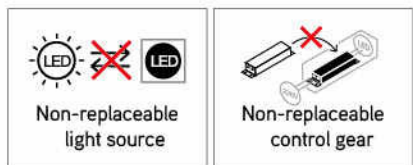




CODICE / CODE	40511	40512	40513	40514	40515	40516	40517	40518
COLORE / COLOUR	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
LUMEN	825	888	1242	1320	2135	2332	2431	2487
Sorgente luminosa W/Light Source W:	10W	10W	15W	15W	25W	25W	30W	30W
Sorgente luminosa/Light Source lumen:	1100	1250	1650	1850	2800	3100	3300	3600
Class Energetica/Energy Class:	E	E	E	E	E	E	E	E
CRI	>80	>80	>80	>80	>80	>80	>80	>80
LED	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar
WATT	10W	10W	15W	15W	25W	25W	30W	30W
PF	>0,5	>0,5	>0,5	>0,5	>0,5	>0,5	>0,9	>0,9
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
FORO / HOLE	Ø90	Ø90	Ø120	Ø120	Ø170	Ø170	Ø200	Ø200
KG	0,14	0,14	0,20	0,20	0,33	0,33	0,45	0,45
PCS	20	20	20	20	20	20	20	20
DIMENSIONI / DIMENSIONS								
a	120	120	150	150	200	200	230	230
b	60	60	60	60	60	60	60	60

LEDSPOT_MULTI-LIGHT



Incasso LED integrato
Corpo in TRP
Diffusore in PC opale
Driver integrato
Temperatura colore selezionabile

Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Built-in driver
Selectable colour temperature

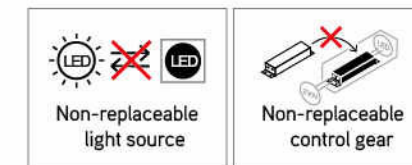



CODICE / CODE	40581
COLORE / COLOUR	bianco white
COLORE LUCE / COLOR T	3000K/4000K/6000K
LUMEN	1962/2040/2088
Sorgente luminosa W/Light Source W:	24W
Sorgente luminosa/Light Source lumen:	2852/3152/3182
Class Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	24W
PF	>0,5
SUPPLY	230V 50/60Hz
FORO / HOLE	Ø190
KG	0,14
PCS	40
DIMENSIONI / DIMENSIONS	
a	220
b	25,5

QUADRO_30



Incasso LED integrato
Corpo in TRP
Diffusore PC opale
Driver integrato

Recessed fitting with built-in LED
TRP body
Opal PC diffuser
Built-in driver

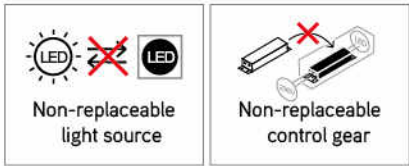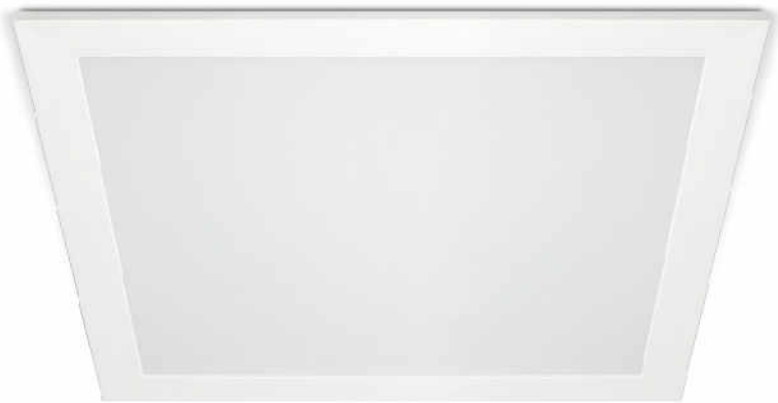

CODICE / CODE	40752	40753
BEAM	111°	111°
COLORE / COLOUR	bianco white	bianco white
COLORE LUCE / COLOR T	3000K	4000K
LUMEN	2400	2500
Sorgente luminosa W/Light Source W:	30W	30W
Sorgente luminosa/Light Source lumen:	3300	3500
Class Energetica/Energy Class:	E	E
CRI	>80	>80
LED	Everlight	Everlight
WATT	30W	30W
PF	>0.9	>0.9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.78	0.78
FORO / HOLE	288x288	288x288
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	300x300	300x300
b	65	65





CAMALEONTE_T UGR<6



Incasso LED integrato
Corpo in TRP
Fonte luminosa arretrata anti-glare
Driver integrato
Temperatura colore selezionabile

Recessed fitting with built-in LED
TRP body
Deep-set anti-glare lighting source
Built-in driver
Selectable colour temperature

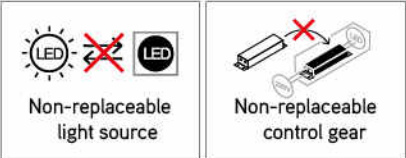



CODICE / CODE	41261
BEAM	38°
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K / 4000K / 6500K
LUMEN	550 / 600 / 650
Sorgente luminosa W/Light Source W:	7W
Sorgente luminosa/Light Source lumen:	800 / 850 / 900
Class Energetica/Energy Class:	E
CRI	>80
LED	Hongli
WATT	7W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,092
FORO / HOLE	75mm
PCS	50
DIMENSIONI / DIMENSIONS	
a	90
b	85

CAMALEONTE_Q UGR<6



Incasso LED integrato
Corpo in TRP
Fonte luminosa arretrata anti-glare
Driver integrato
Temperatura colore selezionabile

Recessed fitting with built-in LED
TRP body
Deep-set anti-glare lighting source
Built-in driver
Selectable colour temperature

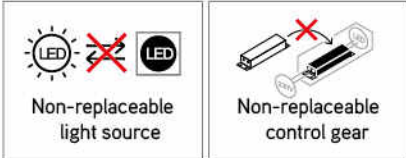


CODICE / CODE	41262
BEAM	38°
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K / 4000K / 6500K
LUMEN	550 / 600 / 650
Sorgente luminosa W/Light Source W:	7W
Sorgente luminosa/Light Source lumen:	800 / 850 / 900
Class Energetica/Energy Class:	E
CRI	>80
LED	Hongli
WATT	7W
PF	>0,5
SUPPLY	220-240V 50/60Hz
KG	0,092
FORO / HOLE	85x85mm
PCS	50
DIMENSIONI / DIMENSIONS	
a	102x102
b	93



Incasso LED integrato
Corpo in pressofusione di alluminio verniciato
Schermo in PC trasparente
Driver incluso

Recessed fitting with built-in LED
Painted die-cast aluminium body
Transparent PC screen
Driver included




CODICE / CODE	40210
BEAM	38°
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K
LUMEN	550
CRI	>80
LED	Refong COB
WATT	9W
PF	>0,5
SUPPLY	230V 50/60Hz
DRIVER	270mA/15-30V
FORO / HOLE	Ø75
KG	0,14
PCS	10
DIMENSIONI / DIMENSIONS	
a	85
b	42



Incasso LED integrato
Corpo in pressofusione di alluminio verniciato
Schermo in PC trasparente
Driver incluso

Recessed fitting with built-in LED
Painted die-cast aluminium body
Transparent PC screen
Driver included



CODICE / CODE	40211
BEAM	25°
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K
LUMEN	550
CRI	>80
LED	Refong COB
WATT	9W
PF	>0,5
SUPPLY	230V 50/60Hz
DRIVER	270mA/15-30V
FORO / HOLE	Ø75
KG	0,14
PCS	10
DIMENSIONI / DIMENSIONS	
a	85
b	65




SPLASH

LED HALO    IP65/20 

Incasso GU5,3
Corpo in pressofusione di alluminio verniciato
Schermo in vetro trasparente

Recessed fitting GU5,3
Painted die-cast aluminium body
Transparent glass screen



CODICE / CODE	40326
COLORE / COLOUR	bianco / white
LAMP	GU5,3
WATT	Max 35W
SUPPLY	12V
FORO / HOLE	Ø72
KG	0,14
PCS	50
DIMENSIONI / DIMENSIONS	
a	82
b	36

HELIOS_50



Incasso
Corpo in pressofusione di alluminio

Recessed fitting
Painted die-cast aluminium body




CODICE / CODE	41243	41244	41246	41245	41247
COLORE / COLOUR	bianco white	nero black	oro gold	cromo chrome	nikel matt nikel matt
LAMP	GU10	GU10	GU10	GU10	GU10
WATT	Max 50W	Max 50W	Max 50W	Max 50W	Max 50W
SUPPLY	230V	230V	230V	230V	230V
FORO / HOLE	Ø60	Ø60	Ø60	Ø60	Ø60
KG	0,1	0,1	0,1	0,1	0,1
PCS	100	100	100	100	100
DIMENSIONI / DIMENSIONS					
a	80	80	80	80	80
b	23	23	23	23	23

HELIOS_50



Incasso orientabile
Corpo in pressofusione di alluminio

Adjustable recessed fitting
Painted die-cast aluminium body



CODICE / CODE	41248	41249	41251	41250	41252
COLORE / COLOUR	bianco white	nero black	oro gold	cromo chrome	nikel matt nikel matt
LAMP	GU10	GU10	GU10	GU10	GU10
WATT	Max 50W	Max 50W	Max 50W	Max 50W	Max 50W
SUPPLY	230V	230V	230V	230V	230V
FORO / HOLE	Ø70	Ø70	Ø70	Ø70	Ø70
KG	0,1	0,1	0,1	0,1	0,1
PCS	100	100	100	100	100
DIMENSIONI / DIMENSIONS					
a	80	80	80	80	80
b	23	23	23	23	23



SOFFITTO / PARETE



INTERNO

PLAFOLED T



Apparecchio da soffitto LED integrato
Corpo in metallo verniciato
Diffusore in MS
Driver incluso

Ceiling fitting Painted metal body
MS diffuser
Driver included

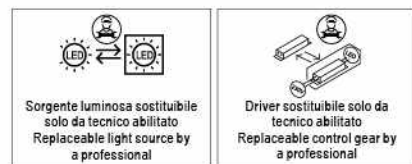


CODICE/CODE	41006	41007	41008	41009	41010	41011
BEAM	130°	130°	130°	130°	130°	130°
COLORE/COLOUR	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white	bianco/white
COLORE/COLOUR T	3000K	4000K	3000K	4000K	3000K	4000K
LUMEN	1820	1900	2430	2500	3180	3190
Sorgente luminosa W/Light Source W:	24W	24W	32W	32W	42W	42W
Sorgente luminosa/Light Source lumen:	2500	2500	3380	3380	4490	4490
Class Energetica/Energy Class:	F	F	F	F	F	F
CRI	>80	>80	>80	>80	>80	>80
LED	NationStar	NationStar	NationStar	NationStar	NationStar	NationStar
WATT	24W	24W	32W	32W	42W	42W
PF	0,5	0,5	0,9	0,9	0,9	0,9
SUPPLY	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz
DRIVER	210mA/115-200V	210mA/115-200V	80mA/432-500V	80mA/432-500V	370mA/115-160V	370mA/115-160V
KG	0.6KG	0.6KG	0.7KG	0.7KG	1KG	1KG
PCS	10	10	10	10	10	10
DIMENSIONI/DIMENSIONS						
a	Ø340	Ø340	Ø390	Ø390	Ø480	Ø480
b	65	65	65	65	78	78

PLAFOLED Q



Apparecchio da soffitto LED integrato
Corpo in metallo verniciato
Diffusore in MS
Driver incluso

Ceiling fitting Painted metal body
MS diffuser
Driver included





CODICE/CODE	41012	41013	41014	41015
BEAM	120°	120°	120°	120°
COLORE/COLOUR	bianco/white	bianco/white	bianco/white	bianco/white
COLORE/COLOUR T	3000K	4000K	3000K	4000K
LUMEN	2560	2660	3180	3300
Sorgente luminosa W/Light Source W:	32W	32W	42W	42W
Sorgente luminosa/Light Source lumen:	3380	3380	4490	4490
Class Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	NationStar	NationStar	NationStar	NationStar
WATT	32W	32W	42W	42W
PF	0,5	0,5	0,9	0,9
SUPPLY	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz	220-240V, 50/60Hz
DRIVER	80mA/432-500V	80mA/432-500V	370mA/115-160V	370mA/115-160V
KG	0.7KG	0.7KG	1KG	1KG
PCS	10	10	5	5
DIMENSIONI/DIMENSIONS				
a	330	330	430	430
b	65	65	65	65

HYDRA T



Apparecchio a soffitto
Anello in alluminio
Schermo in PC opale

Ceiling fitting
Aluminium ring
Opal PC screen




CODICE / CODE	41709	41710
COLORE / COLOUR	bianco/white	bianco/white
LAMP	E27	E27
WATT	Max 20W	Max 2x20W
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,48	0,48
PCS	10	10
DIMENSIONI / DIMENSIONS		
a	260	330
b	80	90

HYDRA Q



Apparecchio a soffitto
Anello in alluminio
Schermo in PC opale

Ceiling fitting
Aluminium ring
Opal PC screen




CODICE / CODE	41711	41712
COLORE / COLOUR	bianco/white	bianco/white
LAMP	E27	E27
WATT	Max 20W	Max 2x20W
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,85	1,3
PCS	10	5
DIMENSIONI / DIMENSIONS		
a	270	410
b	70	80

PANNELLO TONDO



Apparecchio da soffitto LED integrato
Corpo in alluminio verniciato
Diffusore in PMMA
Driver incluso

Ceiling fitting
Painted aluminium body
PMMA diffuser
Driver included




CODICE / CODE	41585
BEAM	120°
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOR T	3000K
LUMEN	4480
CRI	>80
LED	Epistar
WATT	48W
PF	0,9
SUPPLY	230V 50/60Hz
DRIVER	1200mA/30-42V
KG	3,4
PCS	2
DIMENSIONI / DIMENSIONS	
a	Ø600
b	40

ISIDE



Apparecchio soffitto
Corpo in acciaio
Diffusore in PMMA

Ceiling fitting
Steel body
PMMA diffuser




CODICE / CODE	40378
COLORE / COLOUR	bianco
COLORE LUCE / COLOR T	white
LUMEN	3000K
CRI	4000
LED	>80
WATT	Sanan
PF	50W
SUPPLY	0,9
KG	230V 50/60Hz
PCS	2
DIMENSIONI / DIMENSIONS	
a	510
b	100

MAYA



Apparecchio a soffitto
Corpo in materiale plastico
Schermo in PC opale

Ceiling fitting
Plastic body
Opal PC screen





CODICE / CODE	40366	40365
COLORE / COLOUR	bianco white	argento silver
LAMP	E27	E27
WATT	Max 15W	Max 15W
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,4	0,4
PCS	10	10
DIMENSIONI / DIMENSIONS		
a	Ø270	Ø270
b	100	100

DISCO



Apparecchio a soffitto
Corpo in metallo
Schermo in vetro satinato

Ceiling fitting
Metal body
Frosted glass screen




CODICE / CODE	43544	41544	43545	41545
COLORE / COLOUR	bianco white	nikel matt	bianco white	nikel matt
LAMP	E27	E27	E27	E27
WATT	Max 2x28W	Max 2x28W	Max 2x52W	Max 2x52W
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
KG	1,5	1,5	2,8	2,8
PCS	10	10	5	5
DIMENSIONI / DIMENSIONS				
a	Ø300	Ø300	Ø400	Ø400
b	90	90	110	110

LUCE QUADRO



Apparecchio a parete
LED integrato
Corpo in metallo cromato
Diffusore in PC opale

Built-in LED
wall fitting
Chromed metal body
Opal PC diffuser

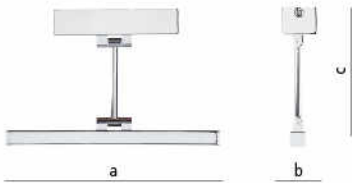

CODICE / CODE	42612	42614
COLORE / COLOUR	cromo/chrome	cromo/chrome
COLORE LUCE / COLOR T	3000K	3000K
LUMEN	500	1000
CRI	>80	>80
LED	Sanan	Sanan
WATT	8W	16W
PF	>0.5	>0.5
SUPPLY	220mA	350mA
PCS	18-36V	24-45V
DIMENSIONI / DIMENSIONS		
a	300	600
b	40	45
c	220	225

LUCE QUADRO




Apparecchio a parete
LED integrato
Corpo in metallo cromato
Diffusore in PC opale

Built-in LED
wall fitting
Chromed metal body
Opal PC diffuser



CODICE / CODE	42609
COLORE / COLOUR	cromo/chrome
COLORE LUCE / COLOR T	3000K
LUMEN	500
CRI	>80
LED	Sanan
WATT	8W
PF	>0.5
SUPPLY	220mA
PCS	18-36V
DIMENSIONI / DIMENSIONS	
a	300
b	40
c	220

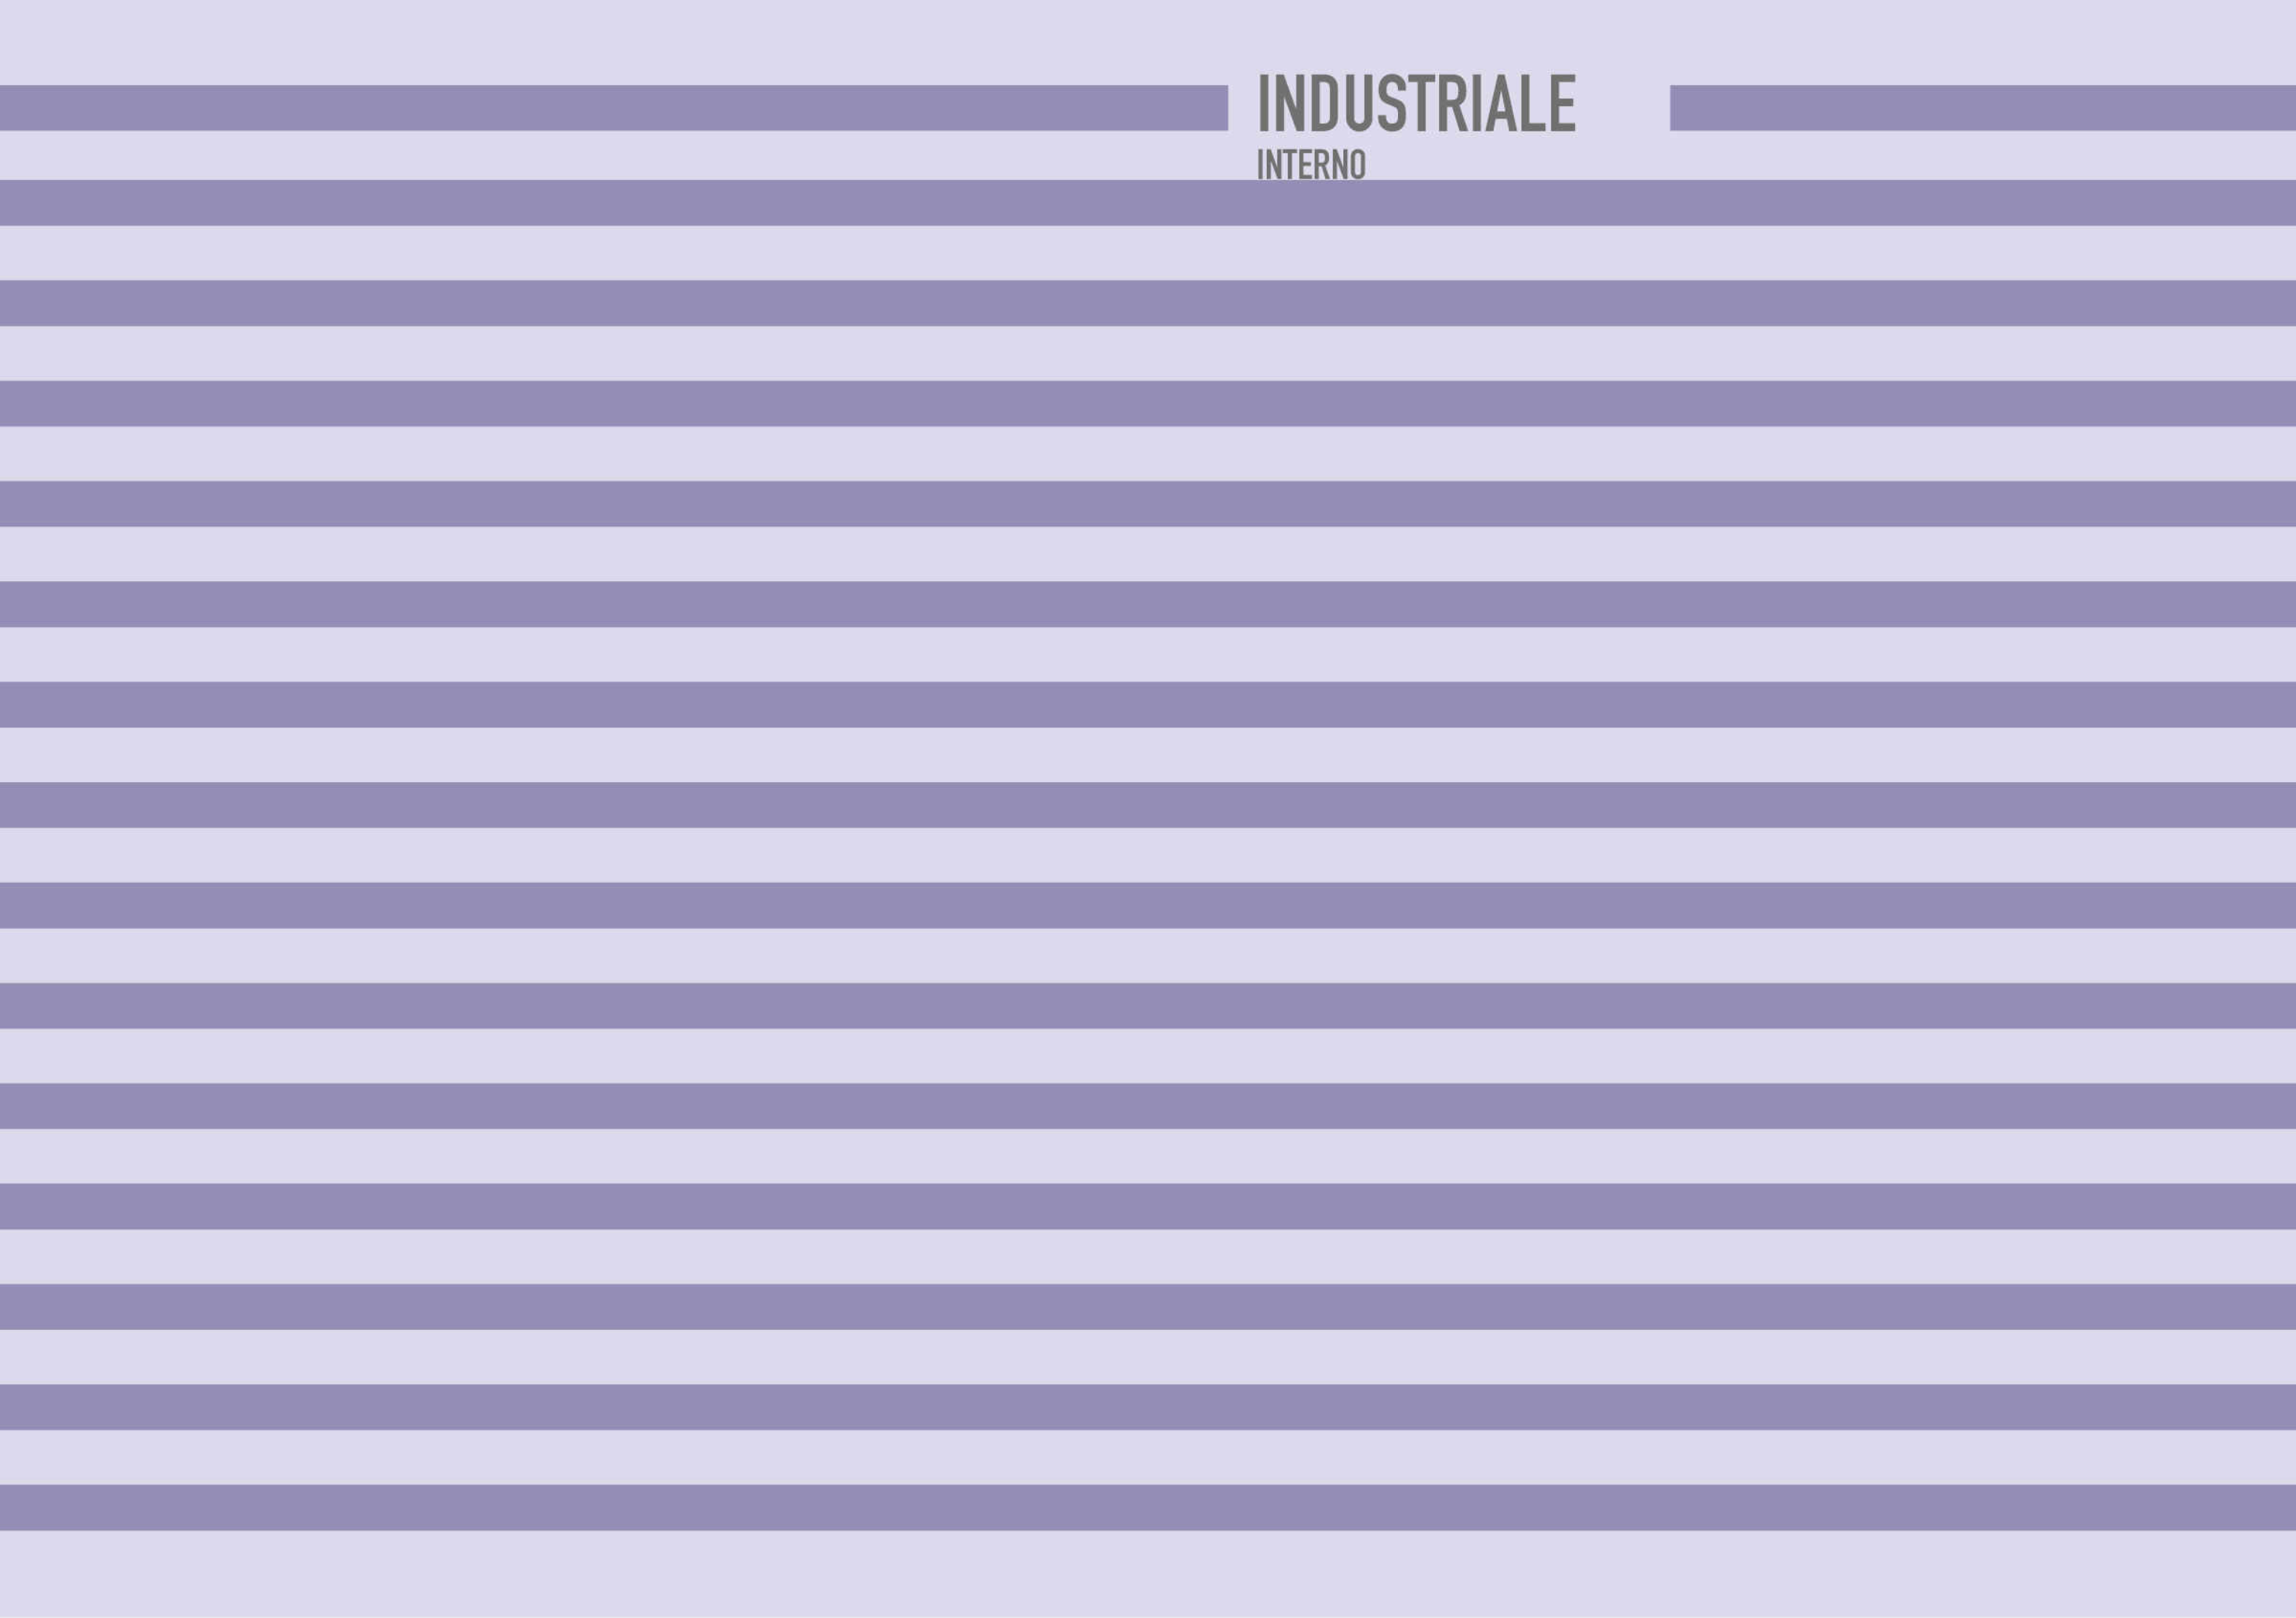

INDUSTRIALE



INTERNO

HORUS



Apparecchio LED integrato
per installazione a sospensione
ed a parete con staffa (accessorio)
Corpo in alluminio
Led CREE/Driver Meanwell

LED fitting to be suspended or wall
mounted through relative bracket
Aluminium body
CREE Led/Meanwell Driver

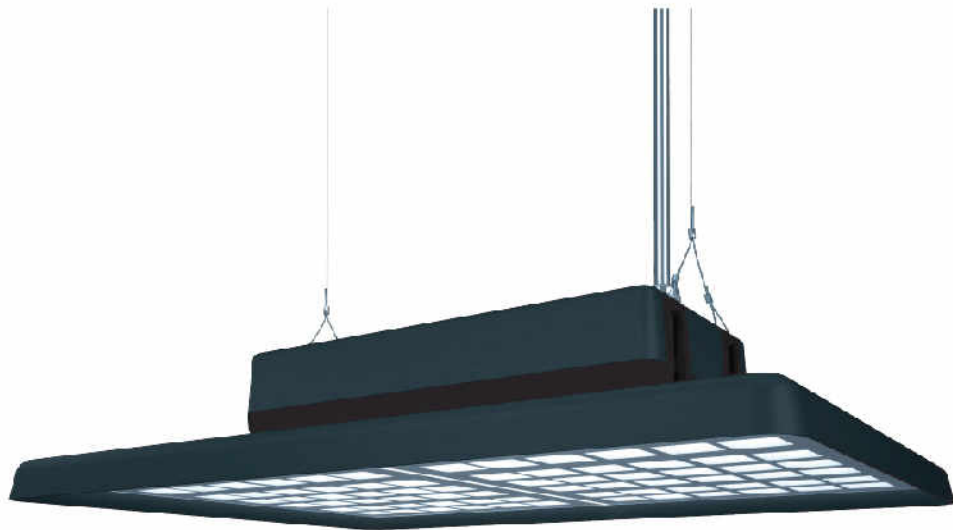

CODICE / CODE	41597	41598	41599
WATT	100W	150W	200W
LUMEN	12000	18000	25000
Sorgente luminosa W/Light Source W:	100W	150W	200W
Sorgente luminosa/Light Source lumen:	12878	18894	25438
Class Energetica/Energy Class:	D	D	D
ANGOLO	80°	80°	80°
COLORE LUCE	4000K	4000K	4000K
CRI	>80	>80	>80
FINITURA	nero	nero	nero
ALIMENTAZIONE	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
PF	>0,9	>0,9	>0,9
T° D'ESERCIZIO	-40°÷70°C	-40°÷70°C	-40°÷70°C
KG	4,9	6,5	6,5
VITA UTILE MEDIA	50000h	50000h	50000h

ACCESSORI
ACCESSORIES

11555 Staffa/Bracket 30x20 cm




ATON



Apparecchio LED integrato
per installazione a sospensione
o su blindosbarra
Corpo in alluminio estruso
Led CREE/Driver Meanwell

LED fitting to be suspended
or mounted on busways
Extruded aluminium body
CREE Led/Meanwell Driver

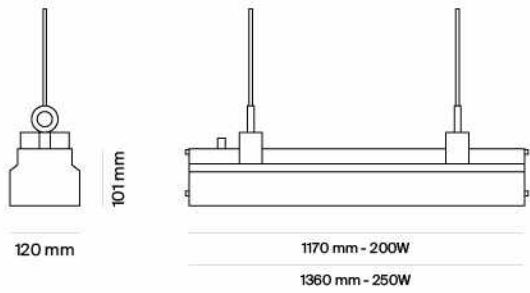


CODICE / CODE	41642	41643
WATT	200W	250W
LUMEN	24000	30000
Sorgente luminosa W/Light Source W:	200W	250W
Sorgente luminosa/Light Source lumen:	25576	31970
Class Energetica/Energy Class:	D	D
ANGOLO	60° x 110°	60° x 110°
COLORE LUCE	4000K	4000K
CRI	>80	>80
FINITURA	nero	nero
ALIMENTAZIONE	220-240V 50/60Hz	220-240V 50/60Hz
PF	>0,9	>0,9
T° D'ESERCIZIO	-40°÷70°C	-40°÷70°C
KG	9,2	10,3
VITA UTILE MEDIA	50000h	50000h

STAGNA_IP65



Corpo in ABS e diffusore in PS
Base struttura interna in metallo
600mm 4 clips di chiusura
1200mm 10 clips di chiusura
1500mm 12 clips di chiusura
Collegamento diretto tensione di rete
Solo per tubi LED 230V

ABS body + PS diffuser
Internal tray in plated iron
600mm 4 latches
1200mm 10 latches
1500mm 12 latches
Direct connection to mains voltage
Only for LED tubes 230V




CODICE / CODE	41555	41556	41557	41558	41559	41560
KG	0,53	0,90	1,19	0,67	1,22	1,57
PCS	12	12	8	8	4	4
DIMENSIONI / DIMENSIONS						
a	655	1263	1564	655	1263	1564
b	66	66	66	106	106	106
c	90	90	90	90	90	90

CARONTE



Proiettore con LED LG alta efficienza
e driver Meanwell
Tecnologia avanzata per la gestione
dissipazione calore
Riflettore ad alta efficienza
Schermo in vetro temperato
Staffa orientabile
Soluzione risparmio energetico
Sostituzione apparecchi loduri metallici


Projector with built-in high efficiency LG LED
and Meanwell Driver
Advanced heat management technology
High efficiency reflector
Tempered glass screen
Solid adjustability of the bracket
Perfect energy saving solution replace HID fittings
Driver included




CODICE / CODE	41563	41564	41565	41566	41567	41568	41569	41570
BEAM	60°	60°	90°	90°	60°	60°	90°	90°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	6000K	4000K	6000K	4000K	6000K	4000K	6000K
LUMEN	11000	11640	11000	11640	14000	15050	14000	15050
Sorgente luminosa W/Light Source W:	108W	108W	108W	108W	135W	135W	135W	135W
Sorgente luminosa/Light Source lumen:	12420	12960	12420	12960	15525	16200	15525	16200
Class Energetica/Energy Class:	F	E	F	E	F	E	F	E
CRI	>80	>80	>80	>80	>80	>80	>80	>80
LED	LG3030	LG3030	LG3030	LG3030	LG3030	LG3030	LG3030	LG3030
WATT	120W	120W	120W	120W	150W	150W	150W	150W
PF	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
KG	5,3	5,3	5,3	5,3	6,07	6,07	6,07	6,07
PCS	1	1	1	1	1	1	1	1
DIMENSIONI / DIMENSIONS								
a	374	374	374	374	374	374	374	374
b	459	459	459	459	467	467	467	467
c	410	410	410	410	410	410	410	410
d	246	246	246	246	266	266	266	266

PROIETTORI

ESTERNI



LED Floodlight
Die-cast aluminium body
Tempered transparent glass
Built-in driver




CODICE / CODE	41183	41170	41171	41172
BEAM	95°	95°	95°	95°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K
LUMEN	4500	8500	12000	17000
Sorgente luminosa W/Light Source W:	50W	100W	150W	200W
Sorgente luminosa/Light Source lumen:	4900	10000	15000	19500
Class Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	BRIDGELUX SMD 2835	BRIDGELUX SMD 2835	BRIDGELUX SMD 2835	BRIDGELUX SMD 2835
WATT	50W	100W	150W	200W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	1	2,4	4,5	5,7
PCS	6	6	4	4
DIMENSIONI / DIMENSIONS				
a	191	262	340	390
b	141	210	275	300
c	67	70	50	50





Proiettore E27 completo di lampada PAR IP65 3000K 40° o 115°
Corpo in materiale plastico


E27 outdoor fitting with IP65 3000K PAR 40° or 115° included
Plastic body



F



- APPARECCHIO COMPLETO DI LAMPADA IP65
- FITTING WITH IP65 BULB INCLUDED



CODICE / CODE	41791	41792
BEAM	40°	115°
COLORE / COLOUR	nero/balck	nero/balck
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	6W	6W
LUMEN Ø 360°	550	550
LUMEN Ø 120°		520
LUMEN Ø 90°	530	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,175	0,175
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	118	118
b	94	94
c	176	176
d	154	154




CODICE / CODE	41793	41794
BEAM	40°	115°
COLORE / COLOUR	nero/balck	nero/balck
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	10W	10W
LUMEN Ø 360°	900	900
LUMEN Ø 120°		860
LUMEN Ø 90°	870	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,258	0,258
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	135	135
b	126	126
c	178	178
d	154	154

CODICE / CODE	41795	41796
BEAM	40°	115°
COLORE / COLOUR	nero/balck	nero/balck
COLORE LUCE / COLOR T	3000K	3000K
LAMP	E27	E27
WATT	15W	15W
LUMEN Ø 360°	1300	1300
LUMEN Ø 120°		1240
LUMEN Ø 90°	1250	
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz
KG	0,318	0,318
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	151	151
b	151	151
c	200	200
d	154	154



Proiettore LED integrato nero
Corpo in pressofusione di alluminio
Diffusore in vetro trasparente e driver integrato

Black LED Floodlight
Die-cast aluminium body
Transparent glass diffuser
Built-in driver

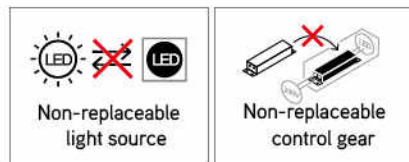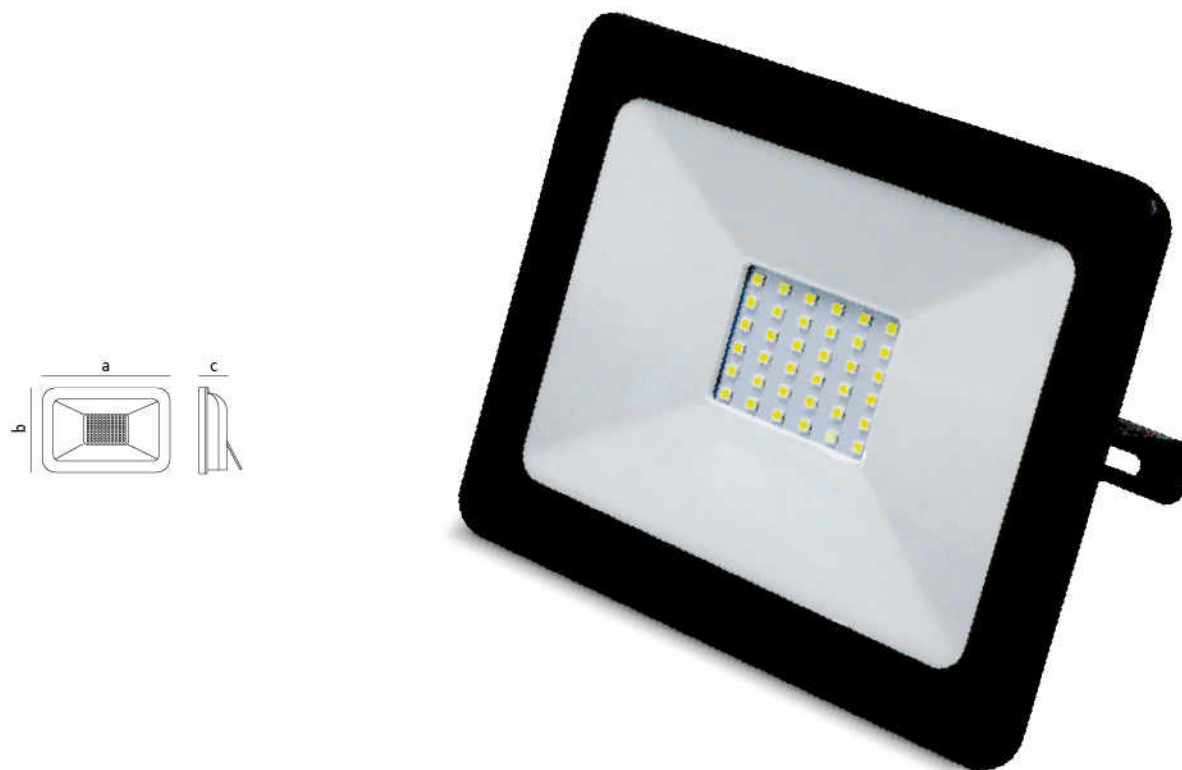

ACCESSORI
ACCESSORIES

11074 Picchetto nero/Black spike



CODICE / CODE	40552	40553	40554	40555	40568
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	3000K	3000K	3000K	3000K	3000K
LUMEN	950	1900	2850	4750	9500
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W	100W
Sorgente luminosa/Light Source lumen:	1158	2225	3421	5891	11903
Class Energetica/Energy Class:	E	E	E	E	E
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,165	0,214	0,374	0,564	1,4
PCS	40	40	20	20	10
DIMENSIONI / DIMENSIONS					
a	100	115	145	185	300
b	70	80	102	130	200
c	12,5	13,5	15,6	16	20

CODICE / CODE	40556	40557	40558	40559	40569
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K	4000K
LUMEN	980	1960	2940	4900	9800
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W	100W
Sorgente luminosa/Light Source lumen:	1196	2420	3761	6050	11985
Class Energetica/Energy Class:	E	E	E	E	E
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,165	0,214	0,374	0,564	1,4
PCS	40	40	20	20	10
DIMENSIONI / DIMENSIONS					
a	100	115	145	185	300
b	70	80	102	130	200
c	12,5	13,5	15,6	16	20



CODICE / CODE	40560	40561	40562	40563	40570
BEAM	120°	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K	6000K
LUMEN	1000	2000	3000	5000	10000
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W	100W
Sorgente luminosa/Light Source lumen:	1259	2535	3802	6215	12000
Class Energetica/Energy Class:	E	E	E	E	E
CRI	>80	>80	>80	>80	>80
WATT	10W	20W	30W	50W	100W
PF	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,165	0,214	0,374	0,564	1,4
PCS	40	40	20	20	10
DIMENSIONI / DIMENSIONS					
a	100	115	145	185	300
b	70	80	102	130	200
c	12,5	13,5	15,6	16	20

LAMPO C/SENSORE



Proiettore LED integrato nero con sensore orientabile
Corpo in pressofusione di alluminio
Diffusore in vetro trasparente e driver integrato

Black LED Floodlight with adjustable sensor
Die-cast aluminium body
Transparent glass diffuser
Built-in driver

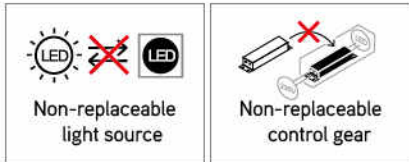

ACCESSORI
ACCESSORIES

11074 Picchetto nero/Black spike
11075 Picchetto bianco/White spike



CODICE / CODE	41224	41225	41226	41227
BEAM	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K
LUMEN	980	1960	2940	4900
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W
Sorgente luminosa/Light Source lumen:	1196	2420	3761	6050
Class Energetica/Energy Class:	E	E	E	E
CRI	>80	>80	>80	>80
WATT	10W	20W	30W	50W
PF	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,200	0,264	0,424	0,614
PCS	40	40	20	20
DIMENSIONI / DIMENSIONS				
a	100	115	145	185
b	70	80	102	130
c	12,5	13,5	15,6	16


CODICE / CODE	41228	41229	41230	41231
BEAM	120°	120°	120°	120°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K
LUMEN	1000	2000	3000	5000
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W
Sorgente luminosa/Light Source lumen:	1259	2535	3802	6215
Class Energetica/Energy Class:	E	E	E	E
CRI	>80	>80	>80	>80
WATT	10W	20W	30W	50W
PF	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,200	0,264	0,424	0,614
PCS	40	40	20	20
DIMENSIONI / DIMENSIONS				
a	100	115	145	185
b	70	80	102	130
c	12,5	13,5	15,6	16

CODICE / CODE	41232	41233	41234	41235
BEAM	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K	4000K	4000K
LUMEN	980	1960	2940	4900
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W
Sorgente luminosa/Light Source lumen:	1196	2420	3761	6050
Class Energetica/Energy Class:	E	E	E	E
CRI	>80	>80	>80	>80
WATT	10W	20W	30W	50W
PF	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,200	0,264	0,424	0,614
PCS	40	40	20	20
DIMENSIONI / DIMENSIONS				
a	100	115	145	185
b	70	80	102	130
c	12,5	13,5	15,6	16

CODICE / CODE	41236	41237	41238	41239
BEAM	120°	120°	120°	120°
COLORE / COLOUR	bianco/white	bianco/white	bianco/white	bianco/white
COLORE LUCE / COLOR T	6000K	6000K	6000K	6000K
LUMEN	1000	2000	3000	5000
Sorgente luminosa W/Light Source W:	10W	20W	30W	50W
Sorgente luminosa/Light Source lumen:	1259	2535	3802	6215
Class Energetica/Energy Class:	E	E	E	E
CRI	>80	>80	>80	>80
WATT	10W	20W	30W	50W
PF	> 0,9	> 0,9	> 0,9	> 0,9
SUPPLY	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz	220/240V 50/60Hz
KG	0,200	0,264	0,424	0,614
PCS	40	40	20	20
DIMENSIONI / DIMENSIONS				
a	100	115	145	185
b	70	80	102	130
c	12,5	13,5	15,6	16

SOFFITTO / PARETE / TERRA


ESTERNI





Apparecchio a soffitto LED integrato
con sensore di presenza
Corpo in termoplastico
Diffusore in PC opale

Built-in LED downlight with integrated
PIR sensor
Thermoplastic body
Opal PC diffuser

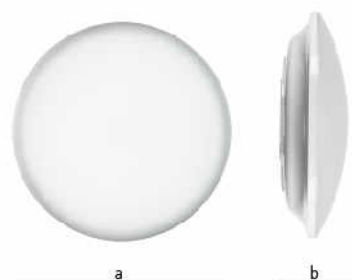


Sensore di presenza 5/6 mt
Microwave sensor 5/6 mt

CODICE / CODE	42577	42578
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	6000K
LUMEN	3000	3150
CRI	80	80
LED	Sanan	Sanan
WATT	30W	30W
PF	0.9	0.9
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0.152	0.152
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	350	350
b	102	102



Apparecchio a soffitto LED integrato
Corpo in alluminio verniciato
Schermo in PC opale
Driver integrato

Ceiling fitting with built-in LED
Painted aluminium body
Opal PC screen
Built-in driver





CODICE / CODE	40232	40234	40233	40235
COLORE / COLOUR	bianco/white	bianco/white	grigio/grey	grigio/grey
COLORE LUCE / COLOR T	3000K	5000K	3000K	5000K
LUMEN	2000	2100	2000	2100
CRI	>80	>80	>80	>80
LED	SMD Edison	SMD Edison	SMD Edison	SMD Edison
WATT	26W	26W	26W	26W
PF	0.95	0.95	0.95	0.95
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
KG	0.81	0.81	0.81	0.81
PCS	8	8	8	8
DIMENSIONI / DIMENSIONS				
a	240	240	240	240
b	45	45	45	45

LUNA_T



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver

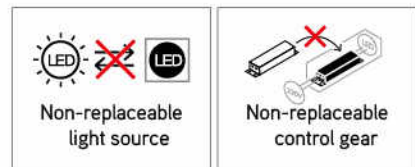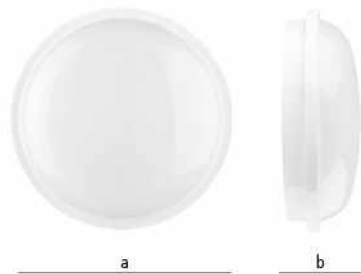


CODICE / CODE	40303	40304
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	1250	1650
Sorgente luminosa W/Light Source W:	15W	20W
Sorgente luminosa/Light Source lumen:	2050	2700
Class Energetica/Energy Class:	D	D
CRI	>80	>80
LED	Epistar	Epistar
WATT	15W	20W
PF	>0,5	>0,5
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,25	0,40
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	167	221
b	62	72

LUNA_0



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver

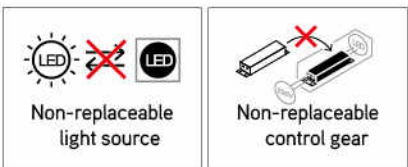



CODICE / CODE	40305	40306
BEAM	110°	110°
COLORE / COLOUR	bianco/white	bianco/white
COLORE LUCE / COLOR T	4000K	4000K
LUMEN	1250	1650
Sorgente luminosa W/Light Source W:	15W	20W
Sorgente luminosa/Light Source lumen:	2050	2700
Class Energetica/Energy Class:	D	D
CRI	>80	>80
LED	Epistar	Epistar
WATT	15W	20W
PF	>0,5	>0,5
SUPPLY	230V 50/60Hz	230V 50/60Hz
KG	0,29	0,42
PCS	20	20
DIMENSIONI / DIMENSIONS		
a	215	271
b	115	146
c	62	76

LADY_T



Apparecchio a soffitto
Corpo in pressofusione di alluminio
verniciato
Schermo in PC opale

Recessed fitting with
built-in LED
TRP body
Opal PC diffuser



CODICE / CODE	40323
COLORE / COLOUR	grigio/grey
LAMP	E27
WATT	Max 2x20W
SUPPLY	230V 50/60Hz
KG	1,2
PCS	6
DIMENSIONI / DIMENSIONS	
a	300
b	86




SIGNUS



Apparecchio a soffitto
Base in pressofusione di alluminio
Schermo in PC opale

Ceiling fitting
Die-cast aluminium base
Opal PC screen

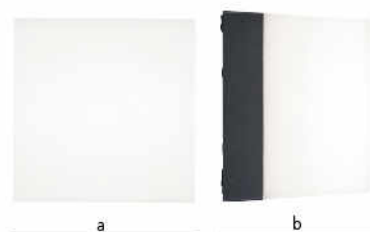

CODICE / CODE	40155
COLORE / COLOUR	nero/black
LAMP	E27
WATT	Max 2x15W
SUPPLY	230V 50/60Hz
KG	1,4
PCS	6
DIMENSIONI / DIMENSIONS	
a	207
b	141






WALLY OPEN

LED FLUO HALO     IP54 

Apparecchio a parete
Corpo in pressofusione di alluminio verniciato
Diffusore in PC opale

Wall fitting
Painted die-cast aluminium body
Opal PC diffuser



CODICE / CODE	40205
COLORE / COLOUR	grigio/grey
LAMP	E27
WATT	Max 52W
SUPPLY	230V 50/60Hz
KG	0.88
PCS	12
DIMENSIONI / DIMENSIONS	
a	250
b	120
c	135

ELEGANT_EVO




Paletto
Corpo in pressofusione di alluminio verniciato
Diffusore in PC opale

Pole
Painted die-cast aluminium body
Opal PC diffuser



Lampada consigliata: T38 Marino Cristal
Recommended bulb: Marino Cristal T38





CODICE / CODE	41184	41185
COLORE / COLOUR	antracite/anthracite	antracite/anthracite
LAMP	E27	E27
WATT	Max 15W	Max 15W
SUPPLY	110-240V 50/60Hz	110-240V 50/60Hz
KG	0.9	1.2
PCS	12	8
DIMENSIONI / DIMENSIONS		
a	102	102
b	500	800

RINGO



Incasso calpestabile LED integrato
Corpo in alluminio anodizzato
Cassaforma in PVC
Driver escluso

Walk-over recessed fitting with built-in LED
Anodized aluminium body
PVC framework
Driver not included

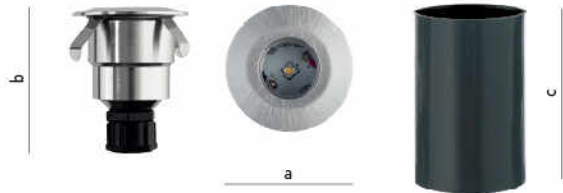


CODICE / CODE	42536	42541
BEAM	60°	60°
COLORE LUCE / COLOR T	3000K	5000K
LUMEN	70	90
LED	RE-FOND	RE-FOND
WATT	1W	1W
SUPPLY	12V DC/AC	12V DC/AC
FORO / HOLE	ø35	ø35
KG	0.15	0.15
PCS	50	50
DIMENSIONI / DIMENSIONS		
a	40	40
b	57	57
c	70	70

KANDO_T



Incasso calpestabile
Corpo in pressofusione di alluminio
Anello in acciaio inox AISI 316
Vetro temperato trasparente
Cassaforma in PVC

Walk-over recessed fitting
Die-cast aluminium body
AISI 316 stainless steel ring
Transparent tempered glass
PVC frame-work



CODICE / CODE	40157
COLORE / COLOUR	INOX
LAMP	GU10
WATT	HALO Max 50W
SUPPLY	230V 50/60Hz
FORO / HOLE	ø100
KG	0,7
PCS	20
DIMENSIONI / DIMENSIONS	
a	105
b	100
c	115
d	140

ACCESSORI	40015	Connettore IP67 una via
ACCESSORIES	40016	Connettore IP67 due via



KANDO_Q



Incasso calpestabile
Corpo in pressofusione di alluminio
Anello in acciaio inox AISI 316
Vetro temperato trasparente
Cassaforma in PVC

Walk-over recessed fitting
Die-cast aluminium body
AISI 316 stainless steel ring
Transparent tempered glass
PVC frame-work



CODICE / CODE	42535
COLORE / COLOUR	INOX
LAMP	GU10
WATT	HALO Max 50W
SUPPLY	230V 50/60Hz
FORO / HOLE	ø100
KG	0,7
PCS	20
DIMENSIONI / DIMENSIONS	
a	105
b	100
c	115
d	140

ACCESSORI	40015	Connettore IP67 una via
ACCESSORIES	40016	Connettore IP67 due via




BRICK_IP67



Segnapasso LED integrato
Corpo in ABS
Cornice in acciaio inox
Schermo in PC trasparente
Cassaforma in PVC
Driver integrato

Wall-step with built-in LED
ABS body
Stainless steel frame
Transparent PC screen
PVC frame-work
Built-in driver



Non-replaceable
light source

Non-replaceable
control gear


CODICE / CODE	45609	45599
COLORE LUCE / COLOR T	3000K	5000K
LUMEN	140	140
Sorgente luminosa W/Light Source W:	2,3W	2,3W
Sorgente luminosa/Light Source lumen:	240	240
Class Energetica/Energy Class:	F	F
LED	RE-FOND	RE-FOND
WATT	2,3W	2,3W
SUPPLY	230V 50/60Hz	230V 50/60Hz
FORO / HOLE	190x65	190x65
KG	0,83	0,83
PCS	12	12
DIMENSIONI / DIMENSIONS		
a	196	196
b	70	70
c	60	60

BRICK



Segnapasso LED integrato
Corpo in ABS
Cornice in acciaio inox
Schermo in PC opale
Cassaforma in PVC
Driver integrato

Wall-step with built-in LED
ABS body
Stainless steel frame
Opal PC screen
PVC frame-work
Built-in driver



Non-replaceable
light source

Non-replaceable
control gear

CODICE / CODE	45610	45611	45601	45600
COLORE LUCE / COLOR T	3000K	3000K	5000K	5000K
LUMEN	35	40	46	60
LED	RE-FOND	RE-FOND	RE-FOND	RE-FOND
WATT	0,8W	1W	0,8W	1W
SUPPLY	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz
FORO / HOLE	67x62	105x32	67x62	105x32
KG	0,17	0,2	0,17	0,2
PCS	50	50	50	50
DIMENSIONI / DIMENSIONS				
a	70	110	70	110
b	70	44	70	44
c	55	54	55	54

**TRASFORMATORI
ACCESSORI**

Trasformatore elettronico LED 12V
LED electronic transformer 12V



CODICE / CODE	21918
PRIMARIO / MAINS	220-240V AC / 50Hz Collegare max 3 lampadine LED Connect max 3 LED bulbs
SECONDARIO / SECONDARY	12V
W	2-30W
IP	20
DIMENSIONS	80 x 38 x H28



CODICE / CODE	22918
PRIMARIO / MAINS	220-240V AC / 50Hz Collegare max 4/5 lampadine LED Connect max 4/5 LED bulbs
SECONDARIO / SECONDARY	12V
W	2-50W
IP	20
DIMENSIONS	117 x 32 x H20

Kit GU10/GZ 10 - code.
40482



PRICE LIST

LISTINO PREZZI

LISTINO IVA ESCLUSA - ECO-FEE INCLUSO

Codice	€	Pag	Codice	€	Pag	Codice	€	Pag	Codice	€	Pag	Codice	€	Pag
11074	4.45	54-56	40517	43.34	18	41012	50.76	33	41251	8.68	29	41653	94.61	9
11075	4.45	56	40518	43.34	18	41013	50.76	33	41252	8.68	29	41654	94.61	9
11622/2	21.03	8-9	40552	11.01	55	41014	70.12	33	41253	62.11	14	41655	102.40	11
11622/3	34.39	10-11	40553	16.70	55	41015	70.12	33	41254	62.11	14	41656	102.40	11
21918	12.13	78	40554	27.38	55	41170	166.95	50	41255	94.09	15	41709	30.00	34
22918	30.87	78	40555	37.40	55	41171	260.44	50	41256	94.09	15	41710	41.00	34
40015	8.07	72-73	40556	11.01	55	41172	320.54	50	41261	19.70	22	41711	41.00	35
40016	13.21	72-73	40557	16.70	55	41183	77.91	50	41262	20.51	23	41712	62.00	35
40155	81.23	66	40558	27.38	55	41184	56.63	70	41544	38.50	39	41791	24.68	53
40157	46.17	72	40559	37.40	55	41185	75.46	70	41545	53.47	39	41792	24.68	53
40205	38.57	69	40560	11.01	55	41224	23.93	57	41555	19.32	46	41793	30.94	53
40210	36.11	24	40561	16.70	55	41225	32.95	57	41556	26.22	46	41794	30.94	53
40211	36.11	25	40562	27.38	55	41226	42.18	57	41557	40.03	46	41795	36.70	53
40232	151.92	61	40563	37.40	55	41227	52.20	57	41558	24.15	46	41796	36.70	53
40233	151.92	61	40568	66.78	55	41228	23.93	57	41559	33.13	46	42535	46.17	73
40234	151.92	61	40569	66.78	55	41229	32.95	57	41560	44.13	46	42536	49.09	71
40235	151.92	61	40570	66.78	55	41230	42.18	57	41563	527.56	47	42538	46.75	8-9
40303	24.64	62	40571	24.05	16	41231	52.20	57	41564	527.56	47	42539	31.16	8-9
40304	29.05	62	40572	33.17	16	41232	23.93	57	41565	527.56	47	42540	38.96	10-11
40305	24.64	63	40573	41.18	16	41233	32.95	57	41566	527.56	47	42541	49.09	71
40306	29.05	63	40574	44.52	16	41234	42.18	57	41567	664.46	47	42542	60.10	10-11
40314	46.75	8-9-10-11	40575	24.05	16	41235	52.20	57	41568	664.46	47	42577	99.06	60
40323	68.95	64	40576	33.17	16	41236	23.93	57	41569	664.46	47	42578	93.45	60
40326	12.62	27	40577	41.18	16	41237	32.95	57	41570	664.46	47	42609	121.32	41
40365	17.54	38	40578	44.52	16	41238	42.18	57	41585	173.63	36	42612	121.32	40
40366	17.54	38	40581	23.00	19	41239	52.20	57	41597	464.12	44	42614	165.84	40
40378	155.11	37	40752	48.20	20	41243	5.79	28	41598	523.11	44	43544	38.25	39
40482	2.70	79	40753	48.20	20	41244	5.79	28	41599	684.50	44	43545	52.17	39
40511	21.03	18	41006	36.73	32	41245	6.90	28	41642	677.82	45	45599	49.68	74
40512	21.03	18	41007	36.73	32	41246	6.90	28	41643	811.38	45	45600	34.94	75
40513	33.25	18	41008	52.09	32	41247	6.90	28	41649	83.48	8	45601	34.94	75
40514	33.25	18	41009	52.09	32	41248	7.12	29	41650	83.48	8	45609	49.68	74
40515	40.40	18	41010	76.80	32	41249	7.12	29	41651	91.27	10	45610	34.94	75
40516	40.40	18	41011	76.80	32	41250	8.68	29	41652	91.27	10	45611	34.94	75

I nostri prodotti sono soggetti a continui sviluppi e cambiamenti. Ci riserviamo il diritto di mutare le specifiche o eliminare alcuni modelli senza preavviso. I colori stampati in questo catalogo non possono produrre fedelmente le tinte dei nostri prodotti. Pertanto sono da considerarsi puramente indicativi. È vietata la riproduzione, anche parziale, di questo catalogo in qualsiasi forma e su qualsiasi supporto senza autorizzazione.

Our products are subjected to continuous changes and developments. We reserve the right to modify the specification or eliminate some models without notice. The colours printed in this catalogue may not reproduce faithfully the hues of the products and have to be considered merely indicative. Total or partial reproduction of this catalogue in any form is not allowed without our prior consent.

INDICE ALFABETICO

ATLANTE	50	PANNELLI LED 60X60	08
ATON	45	PANNELLO LED 60X60 UGR<19	09
BRICK_IP67	74	PANNELLO LED 30X120	10
BRICK	75	PANNELLO LED 30X120 UGR<19	11
CALAMEONTE_T	22	PANNELLO TONDO	36
CALAMEONTE_Q	23	PIKKO	52
CARONTE	47	PLAFOLED_Q	33
DIN	24	PLAFOLED_T	32
DON	25	QUADRO_30	20
DISCO	39	RINGO	71
ERCOLE	14	SIGNUS	66
ERCOLE IP54	15	SPLASH	27
ELEGANT_EVO	70	STAGNA_IP65	46
HELIOS_50 FISSO	28	TRASFORMATORI ELETTRONICI	78
HELIOS_50 REGOLABILE	29	VULCANO EVO	16
HYDRA Q	35	WALLY OPEN	69
HYDRA T	34	ZAGOR	60
HORUS	44		
ISIDE	37		
KANDO_Q	73		
KANDO_T	72		
KIT GU10/GZ/10	79		
LADY_T	64		
LAMPO	54		
LAMPO C/SENSORE	56		
LEDSPOT_TRP1	18		
LEDSPOT_MULTI-LIGHT	19		
LUCE QUADRO	40		
LUNA_O	63		
LUNA_T	62		
MAYA	38		
MOON	61		

