



MARINO CRISTAL SPA

Via Guardia del Consiglio, 31
47899 - Serravalle
REP. DI SAN MARINO
TEL +378 0549 901188
FAX +378 0549 900612
www.marinocristal.com
marinocristal@marinocristal.com

NEWS 2023 LED LIGHTING SOLUTION

Ω HOME
ILLUMINAZIONE

Ω HOME[®]
ILLUMINAZIONE



NEWS 2023
LED LIGHTING
SOLUTION

ORFEO_T



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta ed indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct and indirect lighting
Built-in driver
Selectable colour temperature



CODICE / CODE	43366
BEAM	60°
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	850+850/880+880/900+900
Sorgente luminosa W/Light Source W:	9+9W
Sorgente luminosa/Light Source lumen:	1100+1100/1150+1150/1200+1200
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9+9W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,316
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	162
c	99



ESTERNI - SOFFITTO/PARETE

ORFEO_Q



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Luce diretta ed indiretta
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Direct and indirect lighting
Built-in driver
Selectable colour temperature

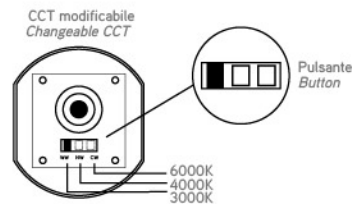

CODICE / CODE	43367
BEAM	60°
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	850+850/880+880/900+900
Sorgente luminosa W/Light Source W:	9+9W
Sorgente luminosa/Light Source lumen:	1100+1100/1150+1150/1200+1200
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9+9W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,344
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	162
c	99



ESTERNI - SOFFITTO/PARETE

ORFEO_T



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Built-in driver
Selectable colour temperature



CODICE / CODE	43368
BEAM	60°
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	850/880/900
Sorgente luminosa W/Light Source W:	9W
Sorgente luminosa/Light Source lumen:	1100/1150/1200
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,23
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	117
c	99



ESTERNI - SOFFITTO/PARETE

ORFEO_Q



Apparecchio LED integrato
Corpo in TRP
Schermo in PC satinato
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Frosted PC screen
Built-in driver
Selectable colour temperature



CODICE / CODE	43369
BEAM	60°
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	850/880/900
Sorgente luminosa W/Light Source W:	9W
Sorgente luminosa/Light Source lumen:	1100/1150/1200
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	9W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,25
PCS	20
DIMENSIONI / DIMENSIONS	
a	78
b	117
c	99

ESTERNI - SOFFITTO/PARETE



EOS_T

Gabbia rimovibile
Black cage removable



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

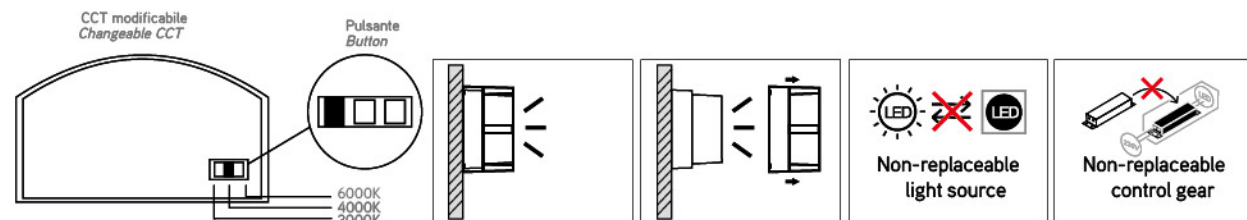

CODICE / CODE	43370
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	1200/1250/1300
Sorgente luminosa W/Light Source W:	15W
Sorgente luminosa/Light Source lumen:	1850/1900/1950
Classe Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	15W
PF	>0.5
SUPPLY	230V 50/60Hz
KG	0.373
PCS	20
DIMENSIONI / DIMENSIONS	
a	Φ170
b	110




EOS_Q

Gabbia rimovibile
Black cage removable



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

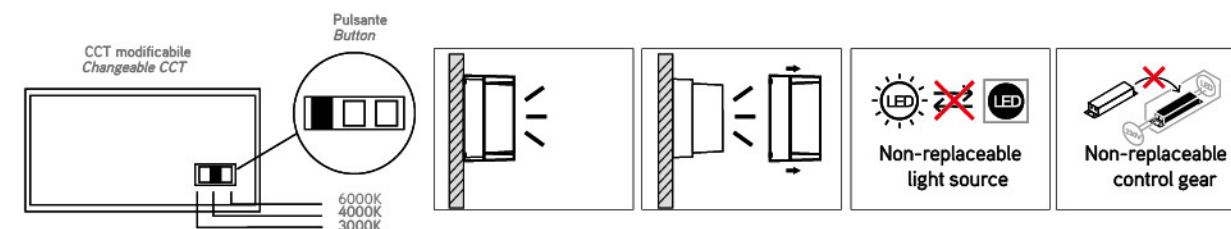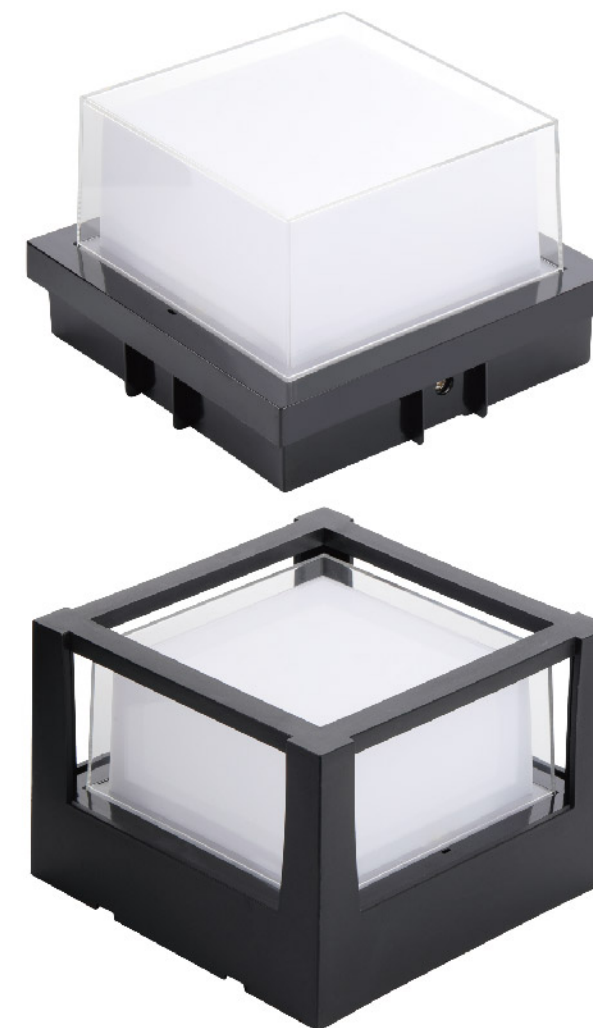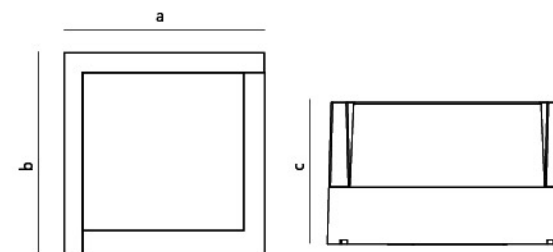




CODICE / CODE	43371
COLORE / COLOUR	nero / black
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	1200/1250/1300
Sorgente luminosa W/Light Source W:	15W
Sorgente luminosa/Light Source lumen:	1850/1900/1950
Classe Energetica/Energy Class:	E
CRI	>80
LED	Epistar
WATT	15W
PF	>0.5
SUPPLY	230V 50/60Hz
KG	0.415
PCS	20
DIMENSIONI / DIMENSIONS	
a	160
b	160
c	110

TILE 100



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

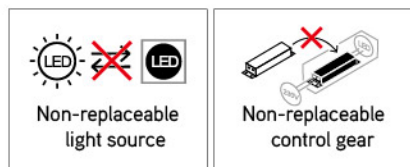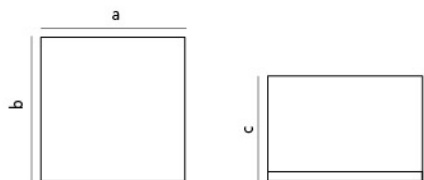




CODICE / CODE	41275
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	600/620/640
Sorgente luminosa W/Light Source W:	5W
Sorgente luminosa/Light Source lumen:	740/760/780
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	5W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,159
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	100
c	75

TILE 200



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

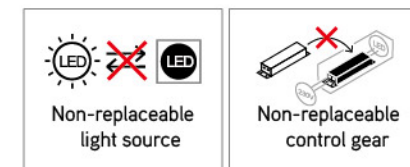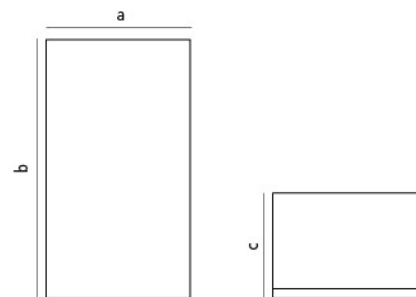




CODICE / CODE	41276
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	950/1000/1050
Sorgente luminosa W/Light Source W:	8W
Sorgente luminosa/Light Source lumen:	1200/1220/1240
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	8W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,272
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	200
c	75

TILE 300



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

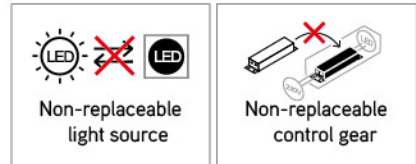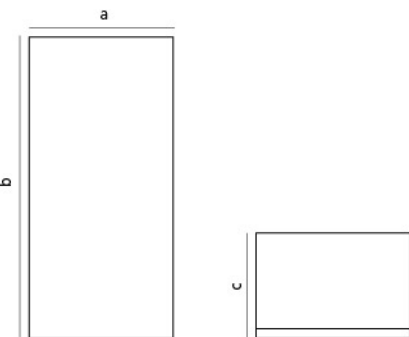




CODICE / CODE	41277
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	1700/1750/1800
Sorgente luminosa W/Light Source W:	15W
Sorgente luminosa/Light Source lumen:	2050/2100/2150
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	15W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,369
PCS	20
DIMENSIONI / DIMENSIONS	
a	100
b	300
c	75

TILE 250



Apparecchio LED integrato
Corpo in TRP
Schermo in PC opale
Driver integrato
Temperatura colore selezionabile

Built-in LED fitting
TRP body
Opal PC screen
Built-in driver
Selectable colour temperature

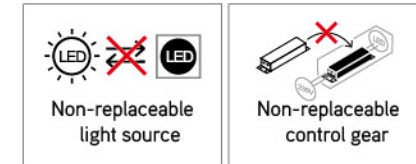
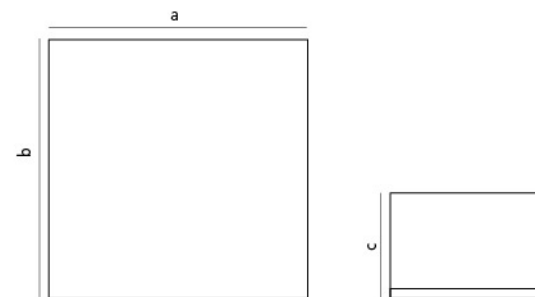


CODICE / CODE	41278
COLORE / COLOUR	bianco/white
COLORE LUCE / COLOUR T	3000K/4000K/6000K
LUMEN	2300/2350/2400
Sorgente luminosa W/Light Source W:	20W
Sorgente luminosa/Light Source lumen:	2750/2850/2950
Classe Energetica/Energy Class:	D
CRI	>80
LED	Epistar
WATT	20W
PF	>0,5
SUPPLY	230V 50/60Hz
KG	0,415
PCS	20
DIMENSIONI / DIMENSIONS	
a	250
b	250
c	75



Proiettore LED integrato
Corpo in pressofusione di alluminio
Schermo in PC trasparente con lenti
Driver incluso

LED Floodlight
Die-cast aluminium body
Transparent PC diffuser with lenses
Built-in driver

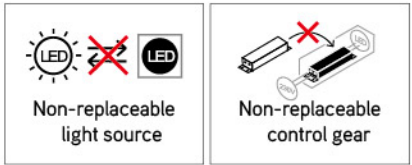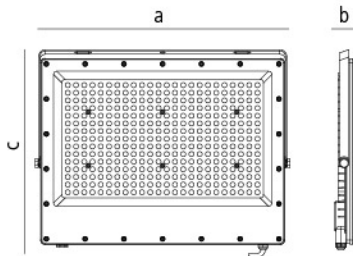

CODICE / CODE	41263	41264	41265	41266
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOUR T	3000K	3000K	3000K	3000K
LUMEN 360°	4500	9500	19000	29000
LUMEN 90°	4000	8200	16500	24800
Classe Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.55	1	1.68	2.56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31.5
c	178	222	295	340

CODICE / CODE	41267	41268	41269	41270
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOUR T	4000K	4000K	4000K	4000K
LUMEN 360°	4550	9550	19050	29050
LUMEN 90°	4050	8250	16550	24850
Classe Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.55	1	1.68	2.56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31.5
c	178	222	295	340

CODICE / CODE	41271	41272	41273	41274
BEAM	60°	60°	60°	60°
COLORE / COLOUR	nero/black	nero/black	nero/black	nero/black
COLORE LUCE / COLOUR T	6500K	6500K	6500K	6500K
LUMEN 360°	4600	9600	19100	29100
LUMEN 90°	4100	8300	16600	24900
Classe Energetica/Energy Class:	F	F	F	F
CRI	>80	>80	>80	>80
LED	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835	SZMTC SMD 2835
WATT	50W	100W	200W	300W
PF	>0,9	>0,9	>0,9	>0,9
SUPPLY	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
KG	0.55	1	1.68	2.56
PCS	20	10	5	5
DIMENSIONI / DIMENSIONS				
a	234	282	383	433
b	24	24	26	31.5
c	178	222	295	340